



Rev.G Dec.-2024

SOT-89 PNP Silicon PNP transistor in a SOT-89 Plastic Package.

600mA

Collector currents to 600mA, HF Product.

General purpose amplifier.

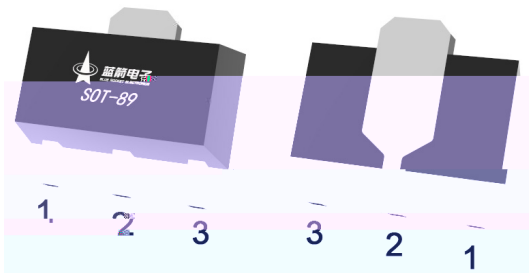


PIN1 Base PIN 2 Collector PIN 3 Emitter

Marking	H2F [*]
---------	------------------


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-60	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-600	mA
Collector Power Dissipation	P_C	500	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -10\mu A$ $I_E = 0$	-60			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -10mA$ $I_B = 0$	-60			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -10\mu A$ $I_C = 0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -50V$ $I_E = 0$			-0.01	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -10V$ $I_C = -150mA^*$	100		300	
	$h_{FE(2)}$	$V_{CE} = -10V$ $I_C = -500mA^*$	50			
	$h_{FE(3)}$	$V_{CE} = -10V$ $I_C = -10mA$	100			
	$h_{FE(4)}$	$V_{CE} = -10V$ $I_C = -1.0mA$	100			
	$h_{FE(5)}$	$V_{CE} = -10V$ $I_C = -0.1mA$	75			
Collector to Emitter Saturation Voltage	$V_{CE(sat)(1)}$	$I_C = -150mA$ $I_B = -15mA$			-0.4	V
	$V_{CE(sat)(2)}$	$I_C = -500mA$ $I_B = -50mA$			-1.6	V
Emitter to Base Saturation Voltage	$V_{BE(sat)(1)}$	$I_C = -150mA$ $I_B = -15mA$			-1.3	V
	$V_{BE(sat)(2)}$	$I_C = -500mA$ $I_B = -50mA$			-2.6	V
Transition Frequency	f_T	$V_{CE} = -20V$ $I_C = -50mA$ $f = 100MHz$	200			MHz

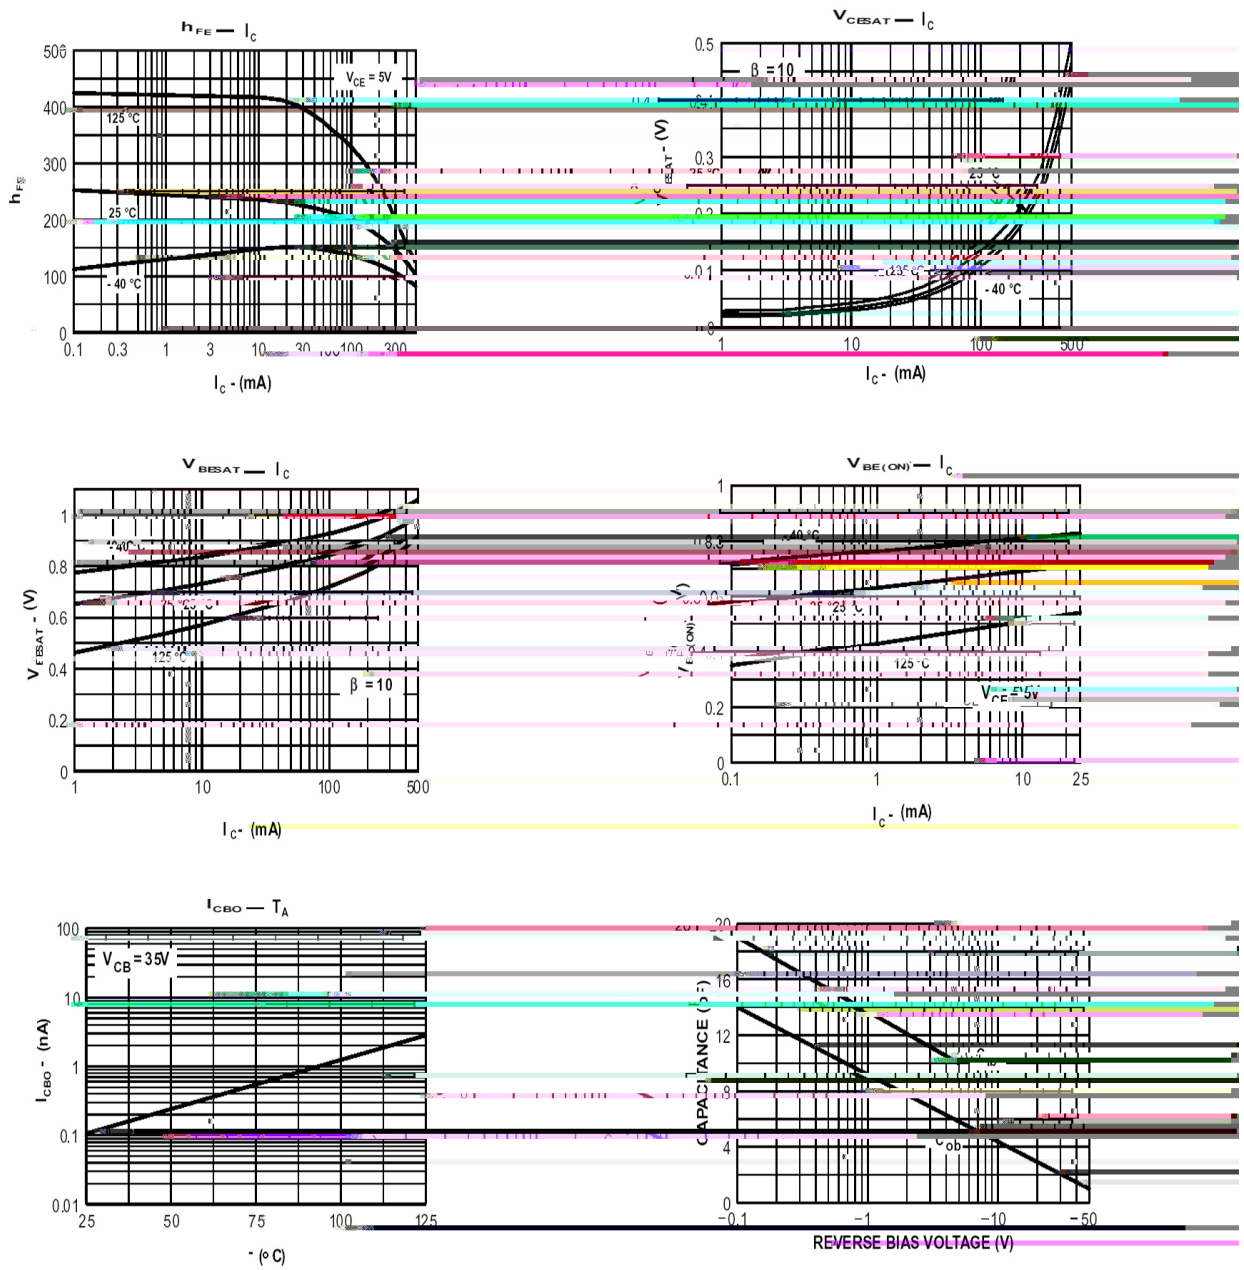

SOT-89

单位: mm

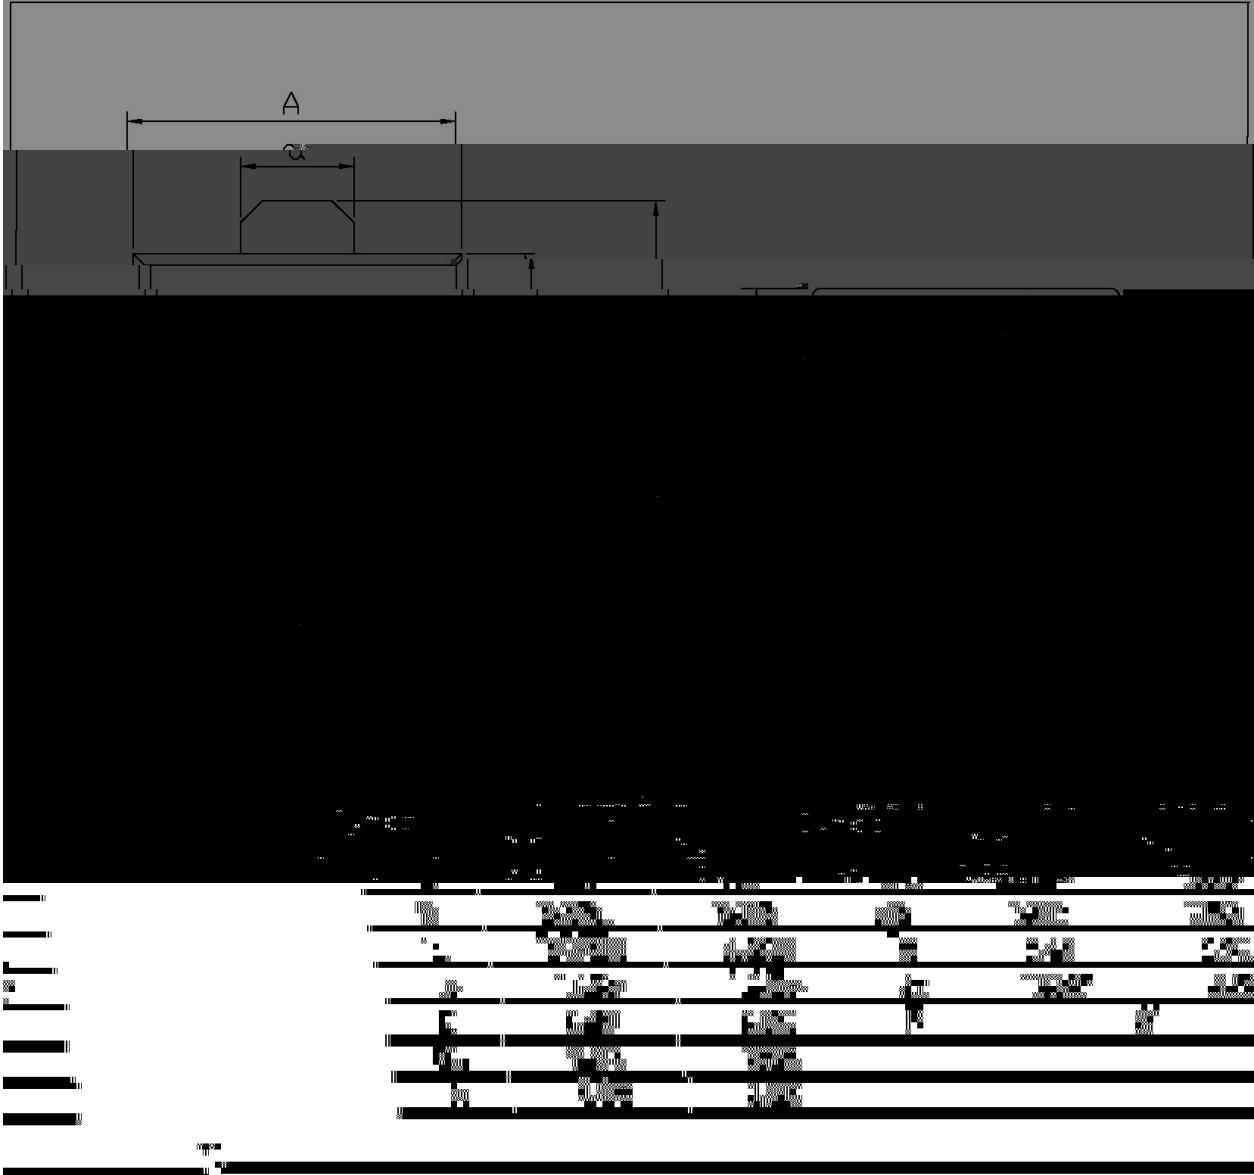

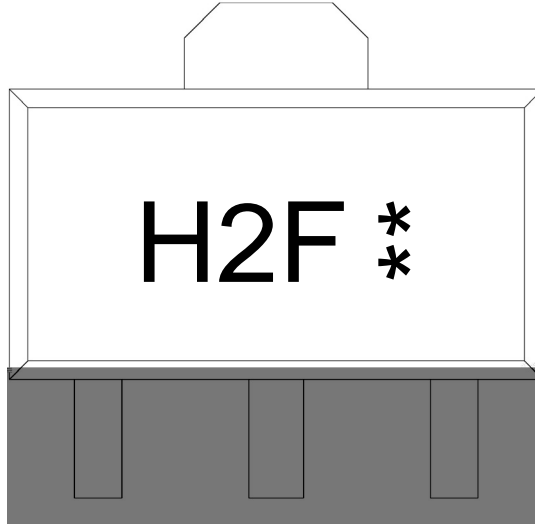

H

2F

**

Note:

H: Company Code

2F: Product Type Code

** : Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------