

MURJ2020CT

Rev.E Mar.-2016

/ Descriptions


TO-220S

Ultrafast Recovery Diode in a TO-220S Plastic Package.

/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

For high frequency, high voltage, high current rectifier diode, freewheeling diode.



PIN1 Anode

PIN 2 Cathode

PIN 3 Anode

PIN 4 NC

/ h_{FE} Classifications & Marking

See Marking Instructions.


MURJ2020CT

Rev.E Mar.-2016

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	200	V
RMS Voltage	V_{RMS}	140	V
DC Blocking Voltage	V_{DC}		

MURJ2020CT
Rev.E Mar.-2016

/ Marking Instructions

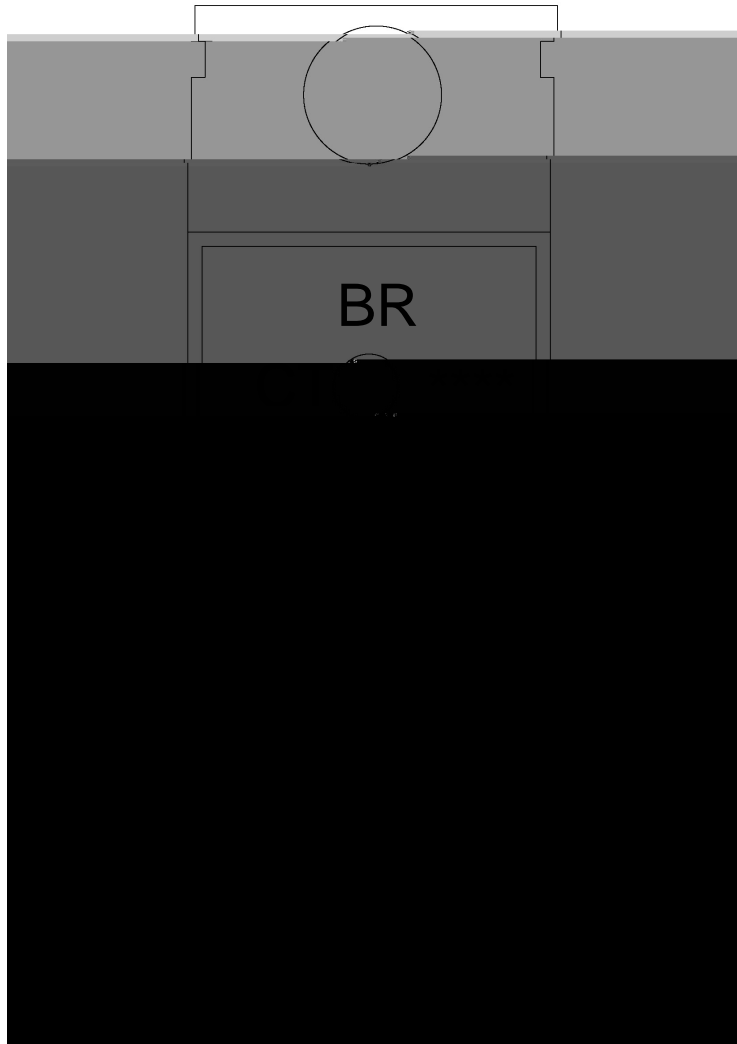

BR

MURJ2020

CT:

Note:


BR: Company Code

MURJ2020 Product Type.

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

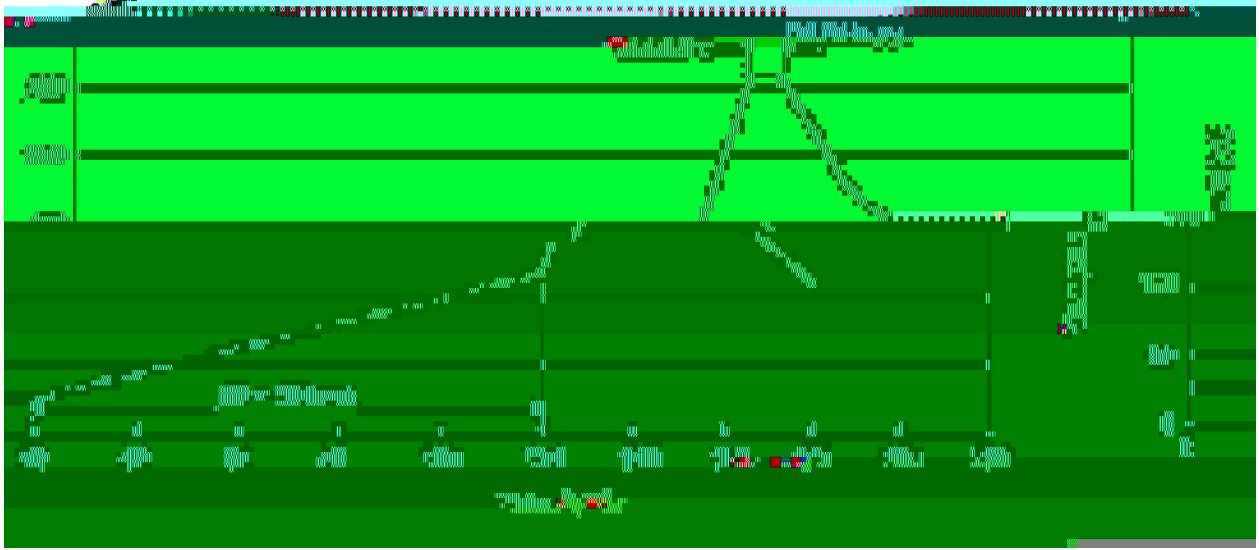

Note:

- | | | | |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type	Units					Dimension	(unit mm ³)
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box		
	/	/	/	/	/	Tube	In8T2BT/TT:0 T.e T#.6629 0 TnT0 T0e7T4 1 T#.007