




| @ f<br>Parameter                        | ... Z<br>Symbol | f ><br>Rating |       |       |       |       |       |       | % y<br>Unit |
|-----------------------------------------|-----------------|---------------|-------|-------|-------|-------|-------|-------|-------------|
|                                         |                 | RS2AB         | RS2BB | RS2DB | RS2GB | RS2JB | RS2KB | RS2MB |             |
| Maximum Repetitive Peak Reverse Voltage | $V_{RRM}$       | 50            | 100   | 200   | 400   | 600   | 800   | 1000  | V           |
| Maximum RMS voltage                     | $V_{RMS}$       | 35            | 70    | 140   | 280   | 420   | 560   | 700   | V           |


Ô ? d • Ž ¢ / Electrical Characteristic Curve



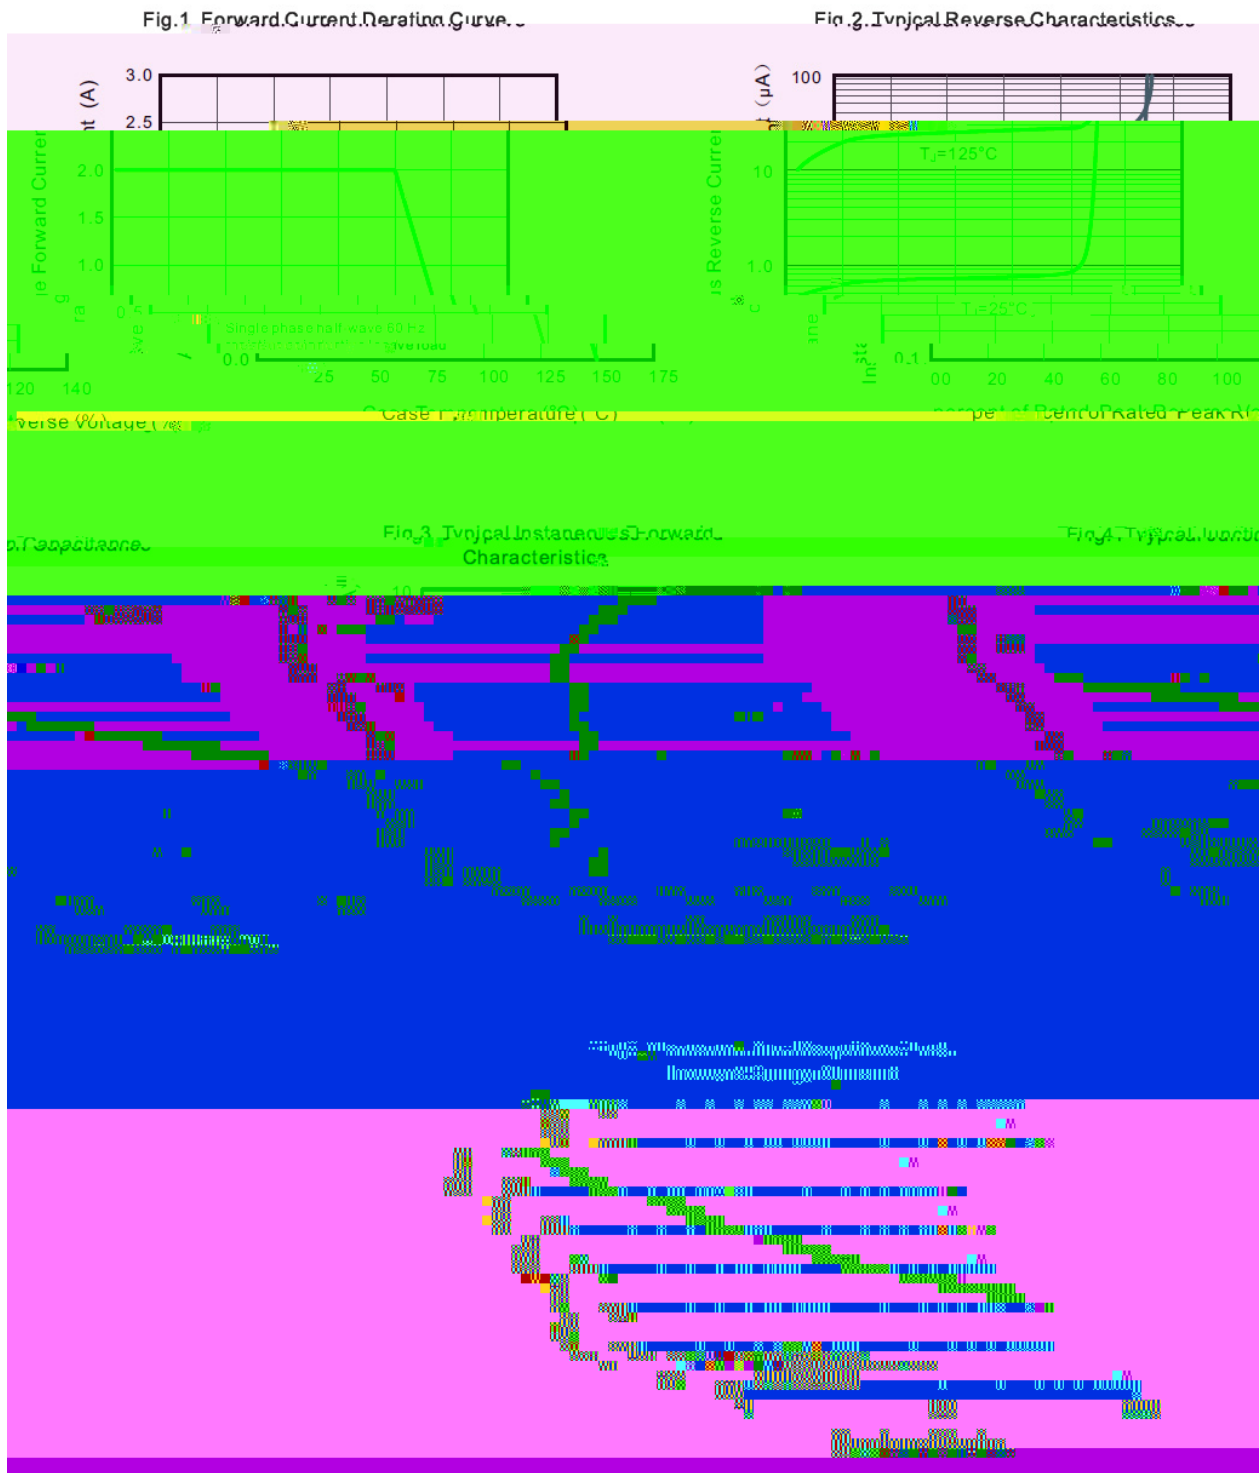


, My f / Marking Instructions

# Marking

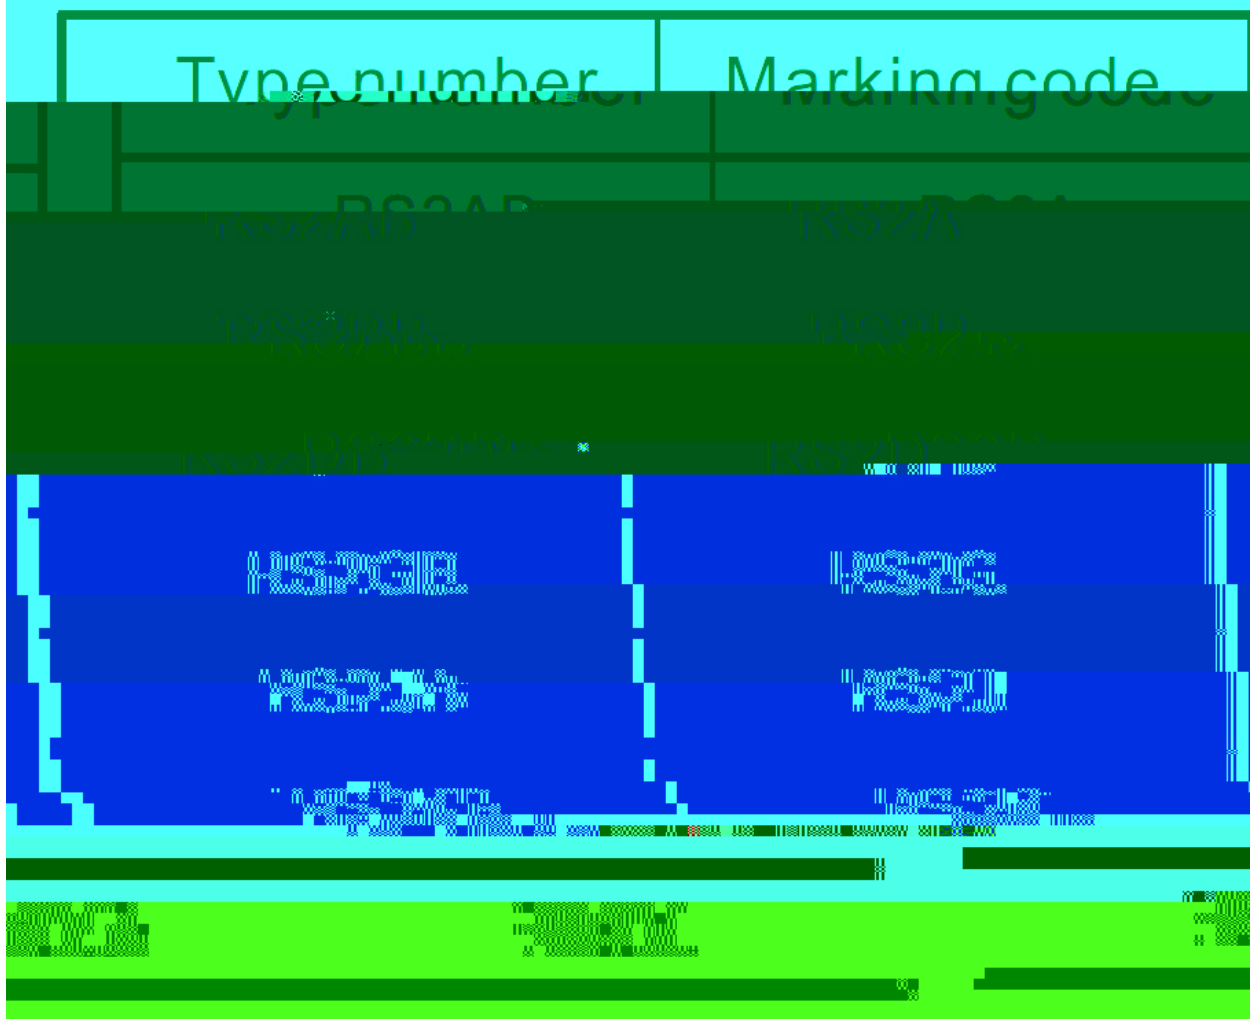

, M y f / Marking Instructions

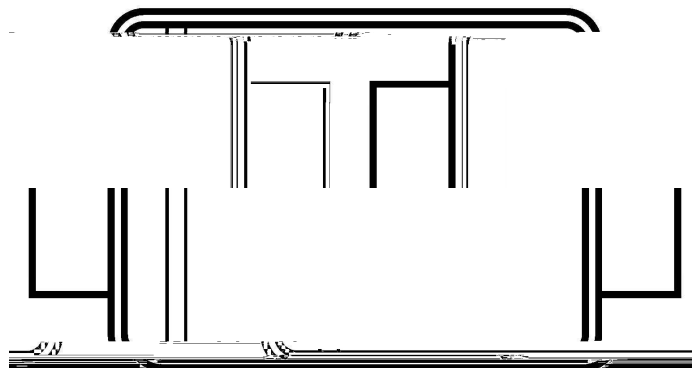

<sup>a</sup> ϕ y

8 9 ' y ° Z W A


\*\*\*\* y ÿ D Z A Ç A k † v Ã W A k e μ ϕ Ã 4 Z W A

Note:

8 9 ' y Product Type Code

\*\*\*\* y À 0A&— Ø Â 1GrÉ !^W " 0The 1stote:

šWD t...•Žč (x/ ) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

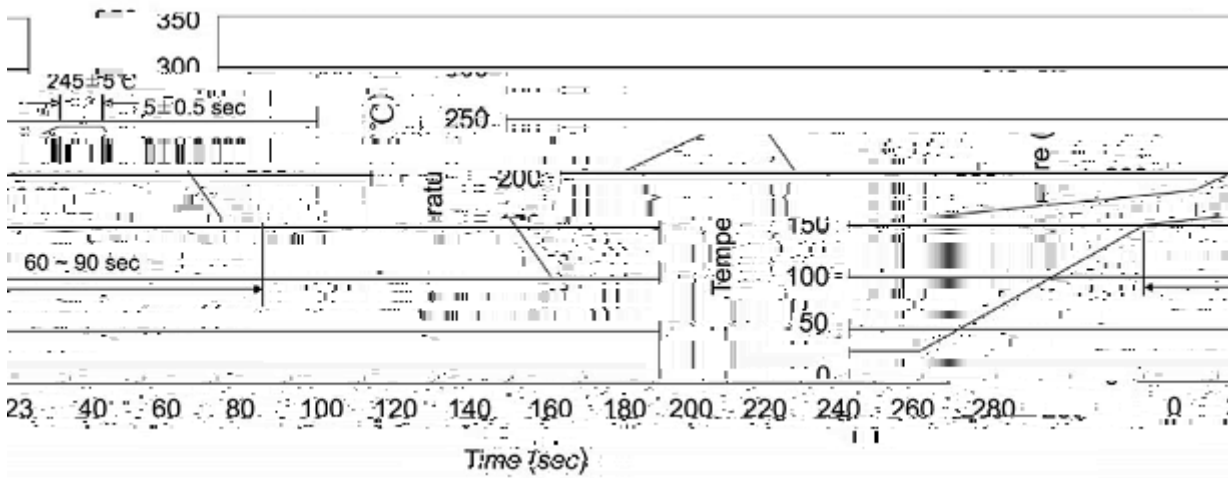

a ç y

- 1o• Ä ½ “† 25 ½150 - k ž • 60 ½90sec;
- 2o• Q > “† 245 r5 - k ž • 4 Ò 5 r0.5sec;
- 3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

- 1.Preheating:25~150 - , Time:60~90sec.
- 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
- 3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p ¯ » ] / Resistance to Soldering Heat Test Conditions

“† y 260 r5 - ž • y 10 r1 sec. Temp.:260 r5 - Time:10 r1 sec

G P á / Packaging SPEC.

2 & x / REEL

| Package Type<br>ß m ù ´ | Units g m ô h      |                           |                       |                              |                       | Dimension g m d Ê (unit ! mm³) |             |             |
|-------------------------|--------------------|---------------------------|-----------------------|------------------------------|-----------------------|--------------------------------|-------------|-------------|
|                         | Units/Reel<br>/  í | Reels/Inner Box<br>  í /ç | Units/Inner Box<br>/ç | Inner Boxes/Outer Box<br>ç/± | Units/Outer Box<br>/± | Reel                           | Inner Boxç  | Outer Box±  |
| SMB                     | 3000               | 5                         | 15000                 | 5                            | 75000                 | 7 s ×11                        | 185X180X105 | 390X385X205 |

„Đ y f / Notices