

RS3AB~RS3MB



DATA SHEET

50V ~ 1000V

3.0A SMB

RS3AB~RS3MB




DATA SHEET

| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

RS3ABR.n6. .0.2.n6.MB

/ Marking Instructions

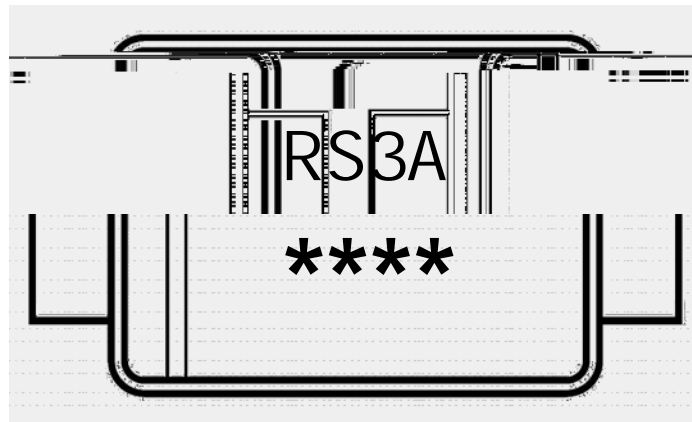

RS3A

1 *

3 *

RS3A

*

*

š WD t... • Ž ϕ (x /) / : KSVKXGZ[XK 6XULORK LUX / 8 8KLRU] 9URJKXOTM 6

^a ϕ y

- 1o• Ä ½ “ † 25 ½150 - k ž • 60 ½90sec;
- 2o• Q › “ † 245 r5 - k ž • 4 Ò 5 r0.5sec;
- 3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

- 1.Preheating:25~150 - , Time:60~90sec.
- 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
- 3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p⁻ »] / Resistance to Soldering Heat Test Conditions

“ † y 260 r5 - ž • y 10 r1 sec. Temp.:260 r5 - Time:10 r1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type