



Rev B Mar.-2021



50V ~ 1000V

2.0A SMA

Surface Mount General Purpose Silicon Rectifiers, Reverse Voltage 50 to 1000V, Forward Current: 2.0A, SMA package.

Surface Mount General Purpose Silicon Rectifiers, Reverse Voltage 50 to 1000V, Forward Current: 2.0A, SMA package.

RoHS 2011/65/EU

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.

General purpose.

General purpose.

Symbolic representation of a diode with a slash through it.

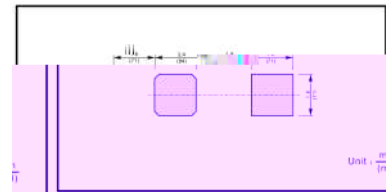


Diagram showing the recommended mounting pad size for the component, with dimensions in millimeters.

The recommended mounting pad size



PIN	DESCRIPTION
1	Cathode
2	Anode



See Marking Instructions.


See Marking Instructions.







SMA

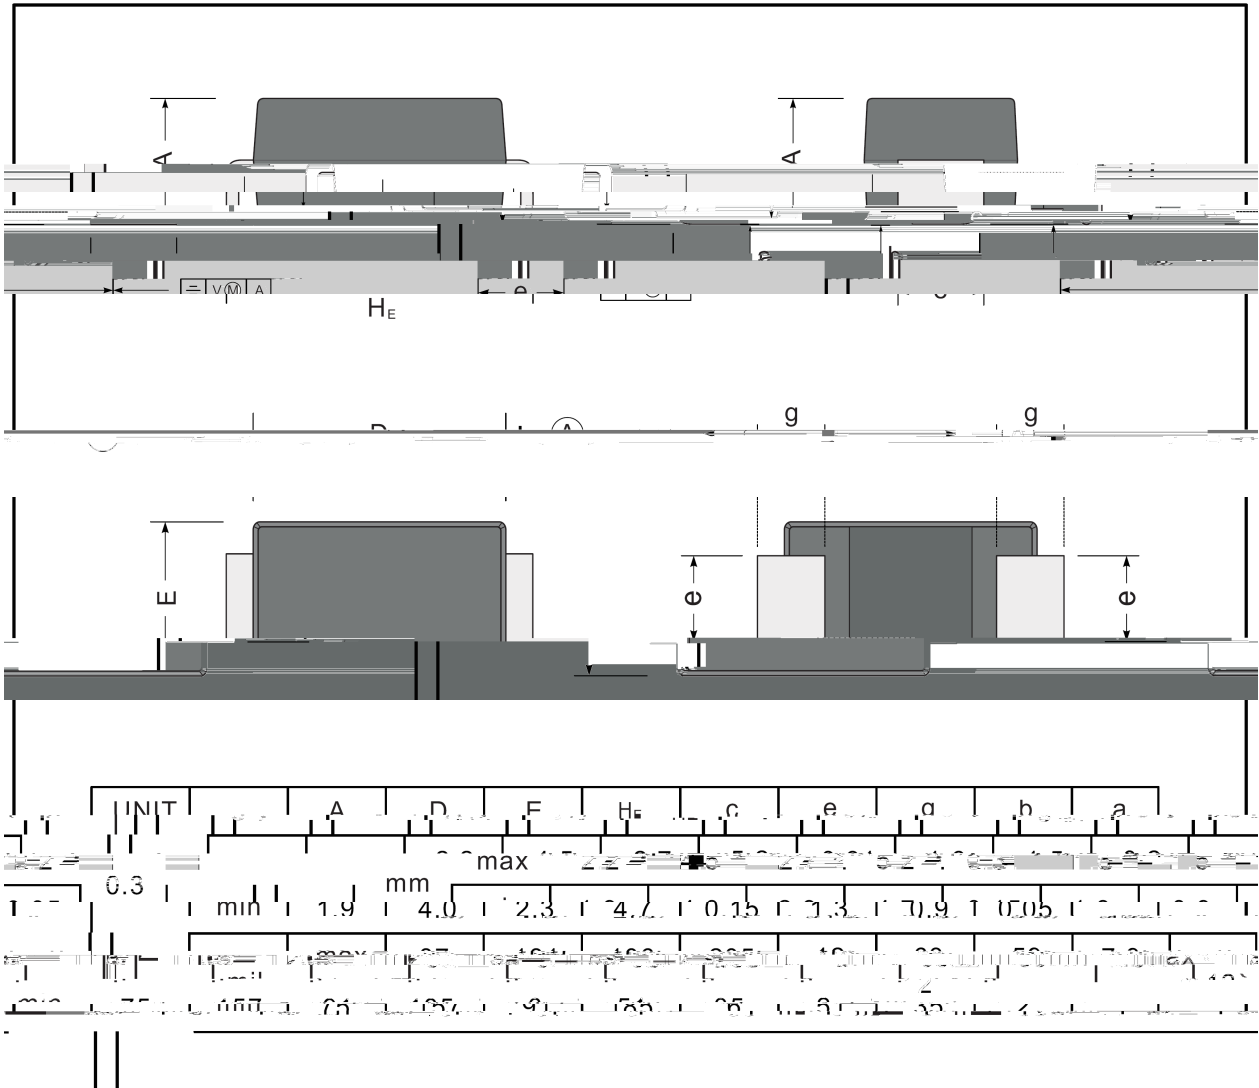



**D**  
Feb B Mar.-2021

**THE DIED**