


Rev.E Mar.-2016

SOT-323 PNP Silicon PNP transistor in a SOT-323 Plastic Package.

S8050W
Complementary pair with S8050W.

Power amplifier applications.


η α α



PIN1 Emitter PIN 2 Base PIN 3 Collector

η α α

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------
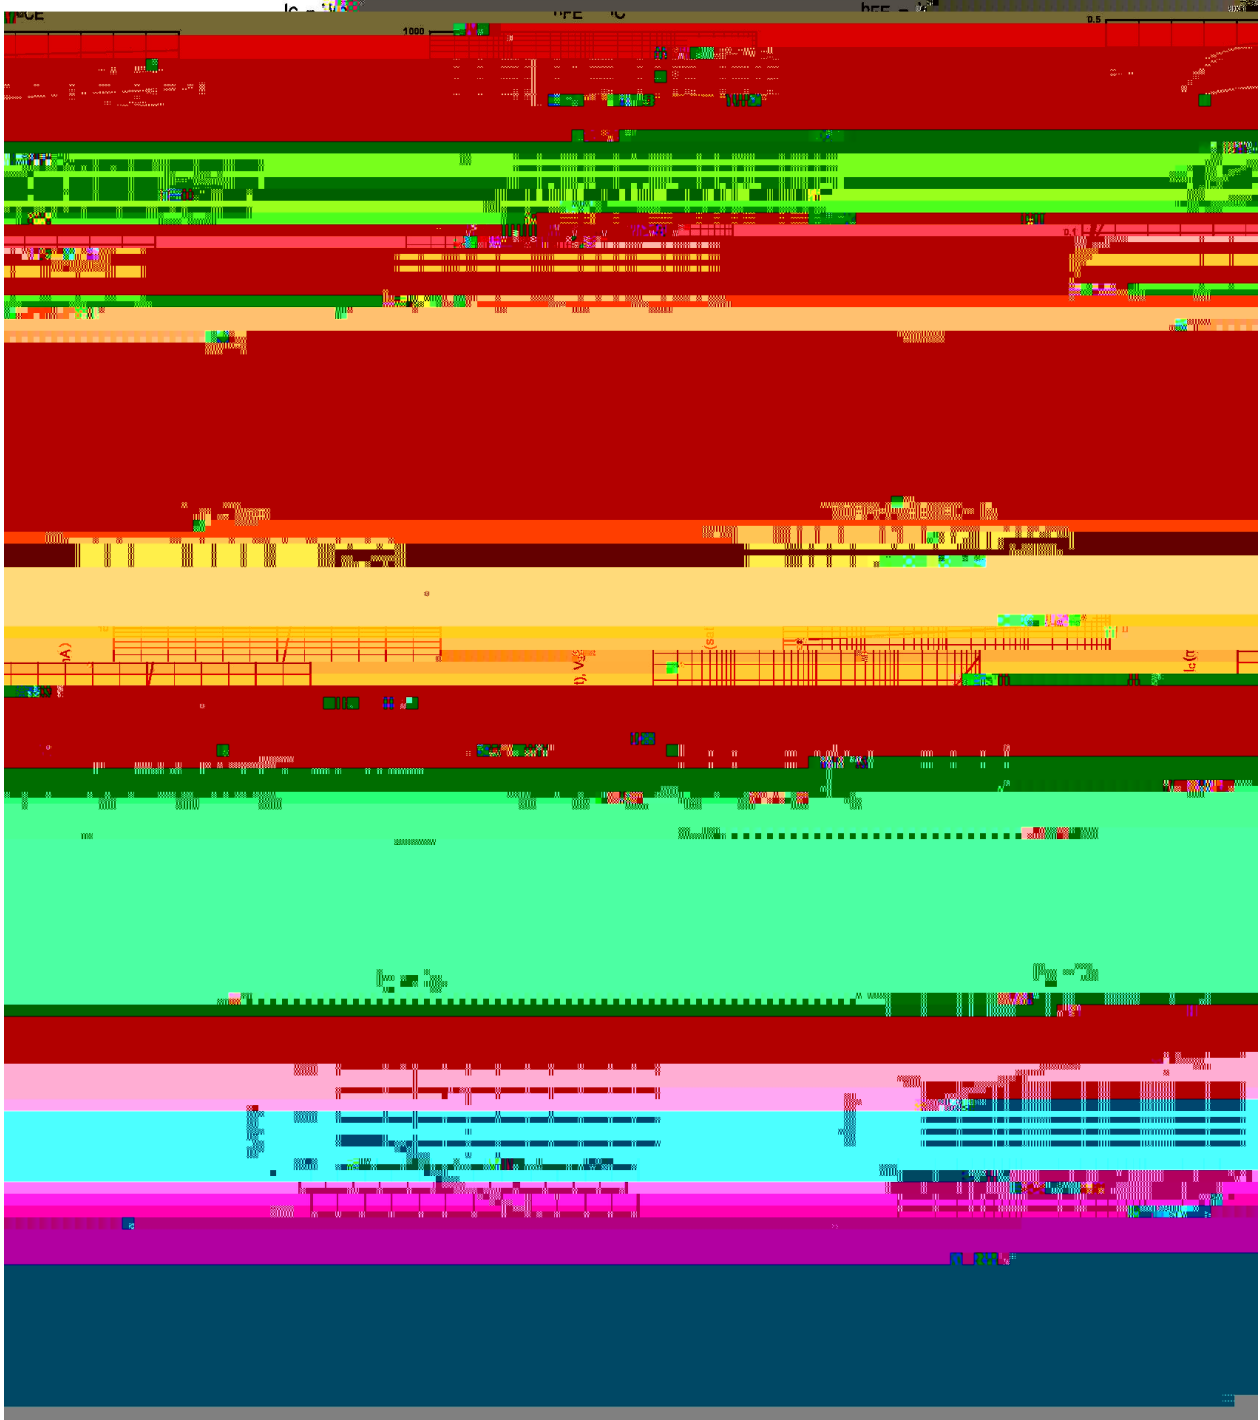
$$= \exists \tilde{A}' \in \mathcal{M} \text{ f}$$


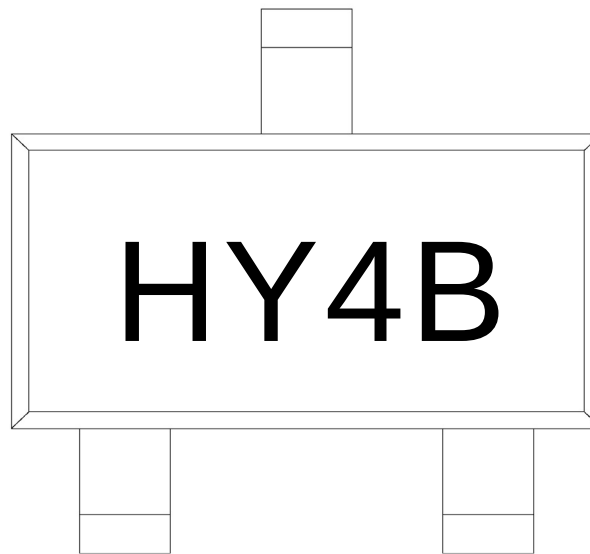
υ Ε Ò L f

SQT-323

单位: mm



图 2



H

Y4

B h_{FE}

Note:


H: Company Code.

Y4: Product Type.

B h_{FE} Classifications Symbol

温度曲线图

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulq j+Se0l uhh,

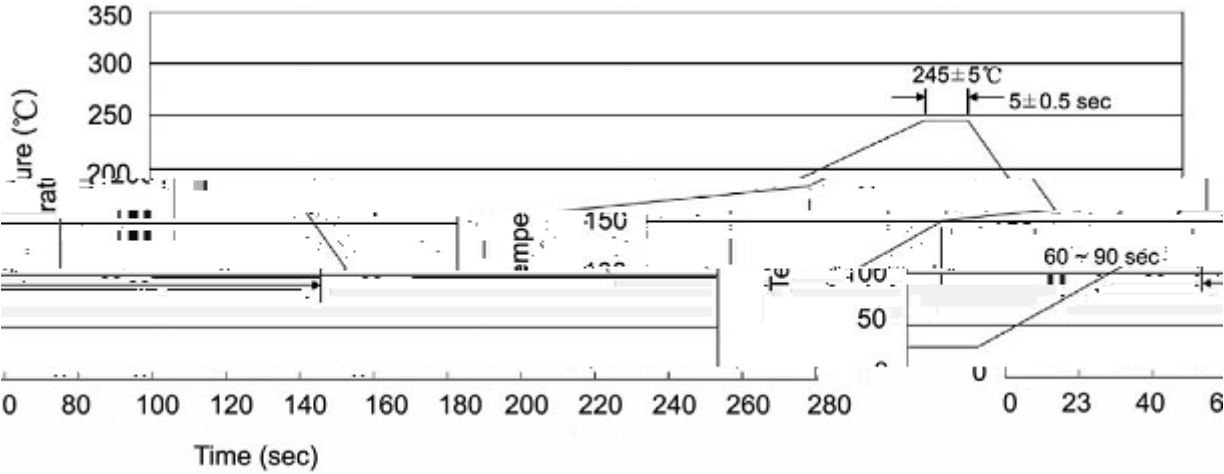

Note:

- 1251506090sec;

2245±55±0.5sec;

3210 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

温度

Y T

260±510±1 sec.Temp.:260±5Time:10±1 sec

—

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

—