


SS12~SS120
Rev. D Jun.-2021



DATA SHEET

20V~200V

1.0A SMA


Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 20 to 200V, Forward Current: 1.0A, SMA package.

RoHS 2011/65/EU


Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.



\$, - 1 2 3 / Electrical Characteristic Curve

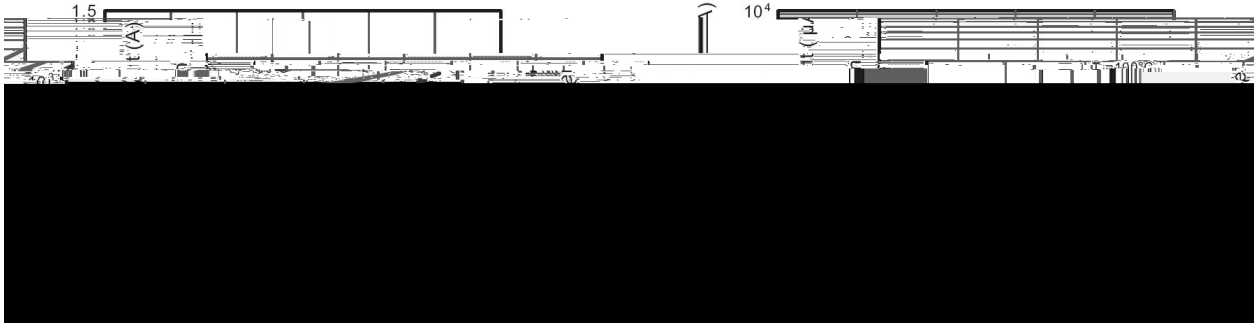


For Rated Forward Voltage (V) vs. Current (A) at Tj = 25°C

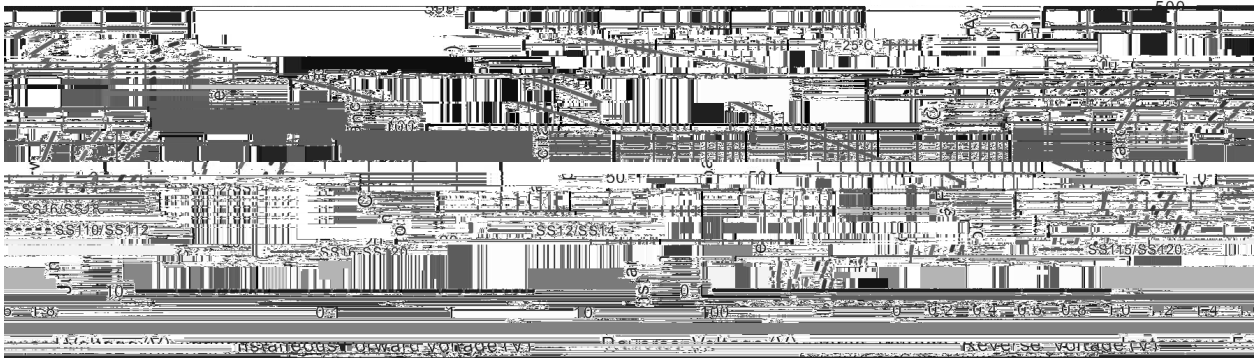

For Rated Forward Voltage (V) vs. Current (A) at Tj = 25°C





For Rated Forward Voltage (V) vs. Current (A) at Tj = 25°C



4 5 6 7 3 / Package Dimensions

SMA

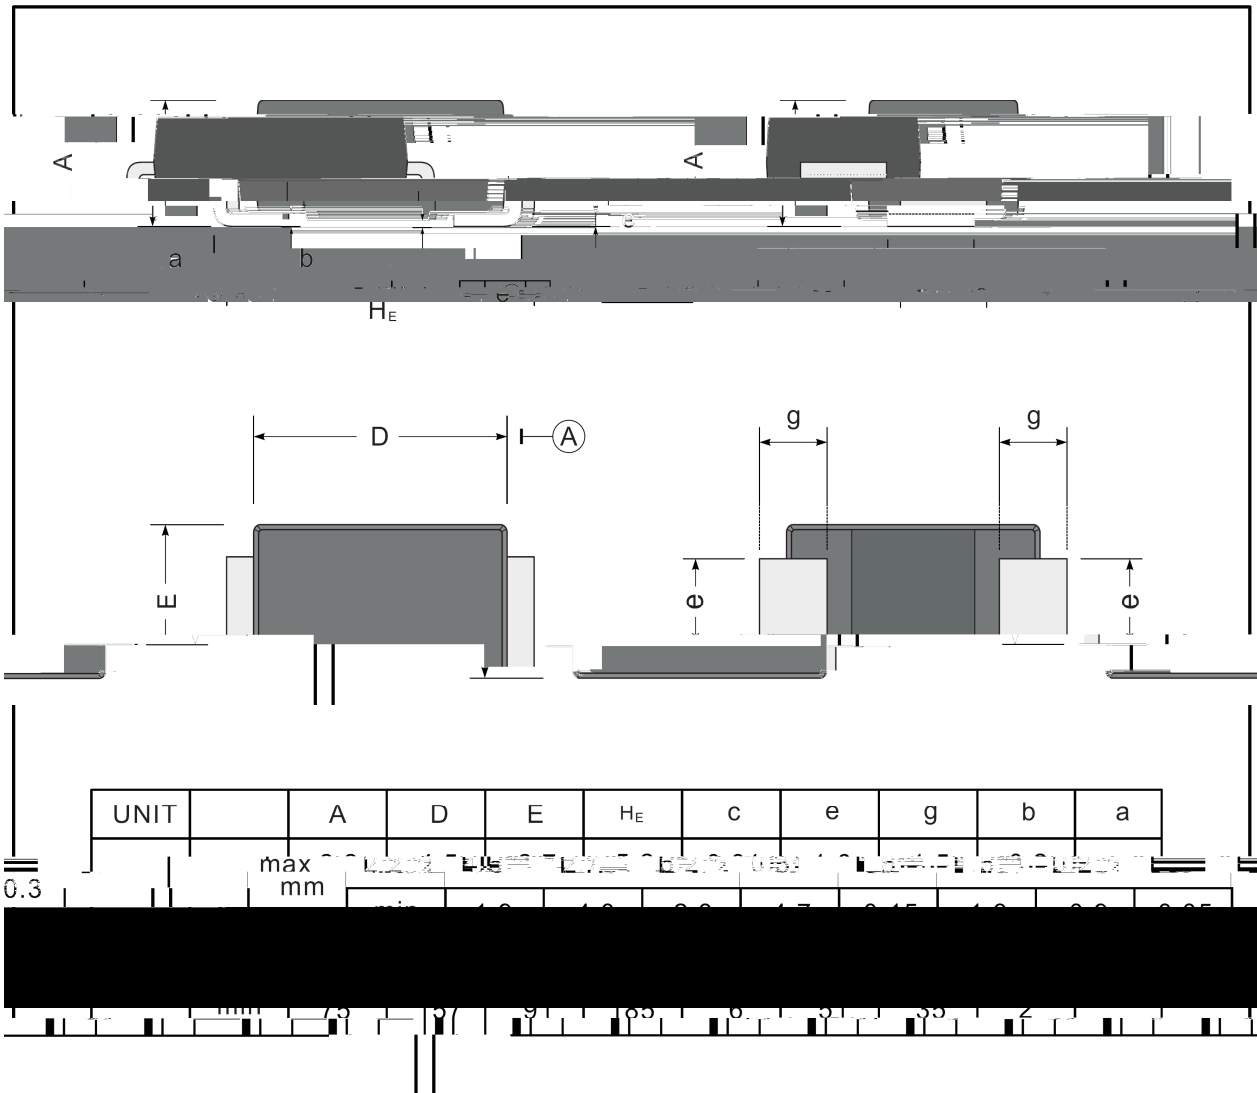



89 / Marking Instructions

Type number	Marking code
SS12	SS11

