

SS32B~SS320B

Rev. B Dec.-2023



DATA SHEET

20V~200V

3.0A SMB

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 20 to 200V, Forward Current: 3.0A, SMB package.

RoHS 2011/65/EU

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.


General purpose.



SS32B~SS320B

Rev. B Dec.-2023


/ Electrical Characteristic Curve

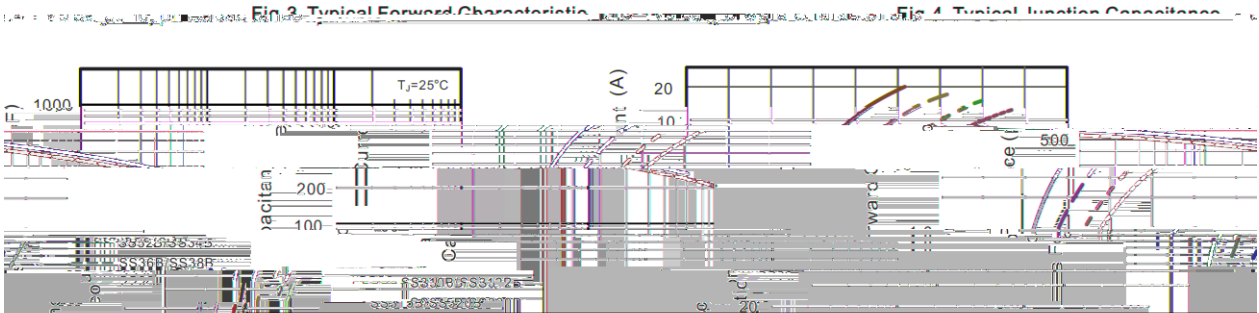

SS32B~SS3

/ Marking Instructions

Marking

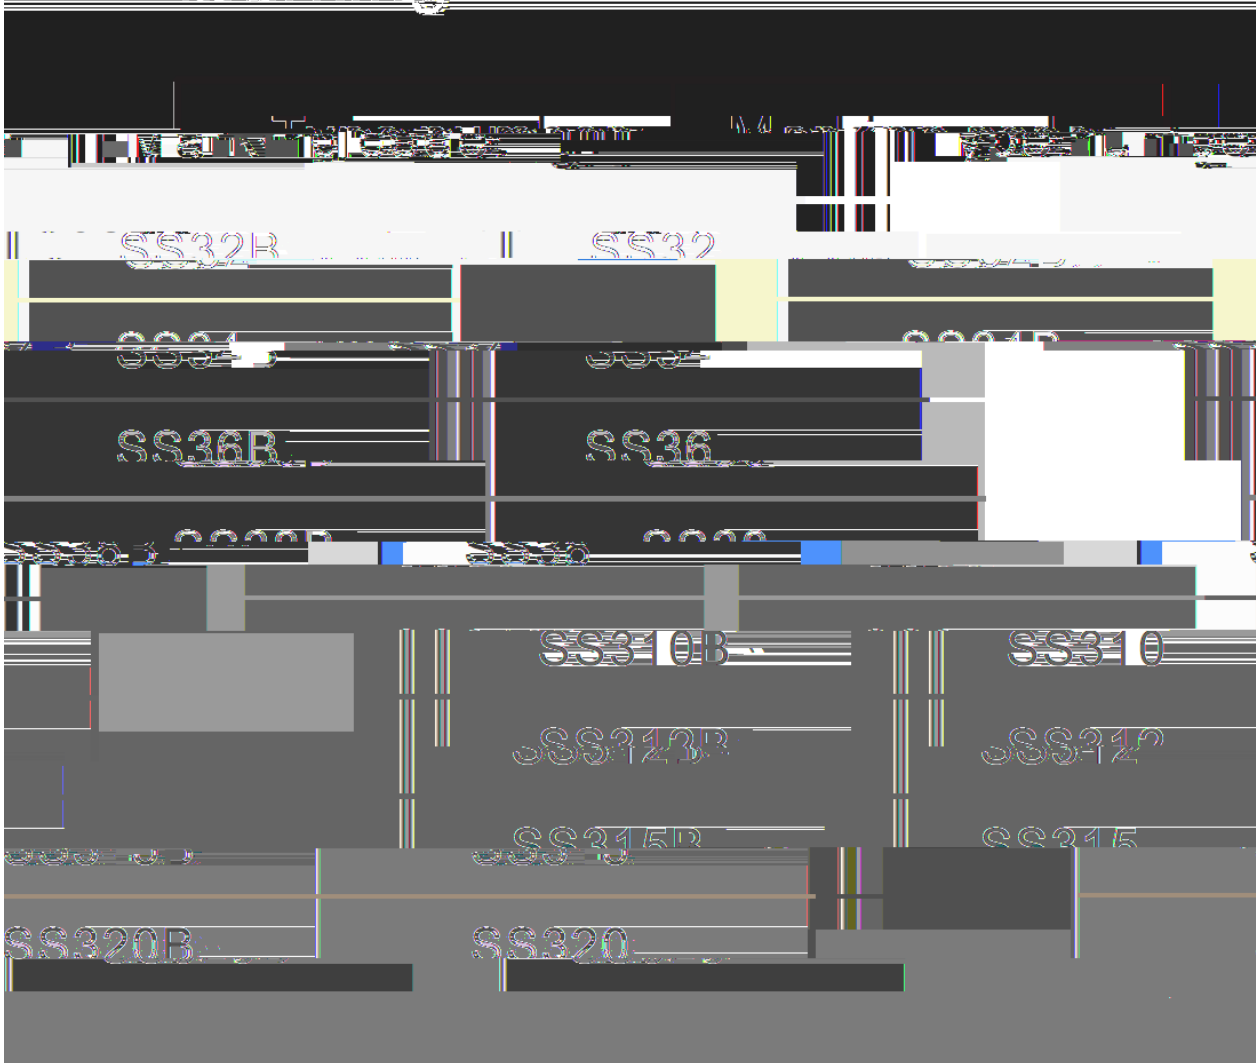

/ Marking Instructions




SS32

1 *

437 EM37JE

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



1 25 150 60 90sec;

Note:

1.Preheating:25~150