


Rev.F Dec.-2022




SMBF

Surface Mount Schottky Barrier Rectifier, Reverse Voltage 20 to 200V, Forward Current:5.0A, SMBF thin package.

Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications, For surface mounted applications, HF Product.


General purpose.

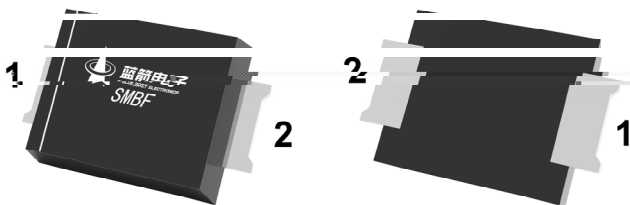


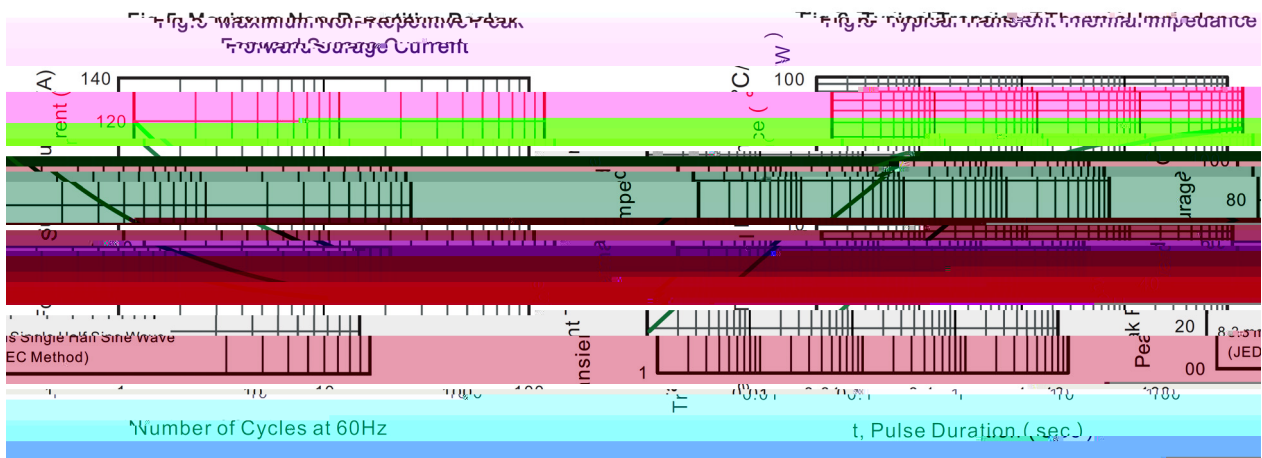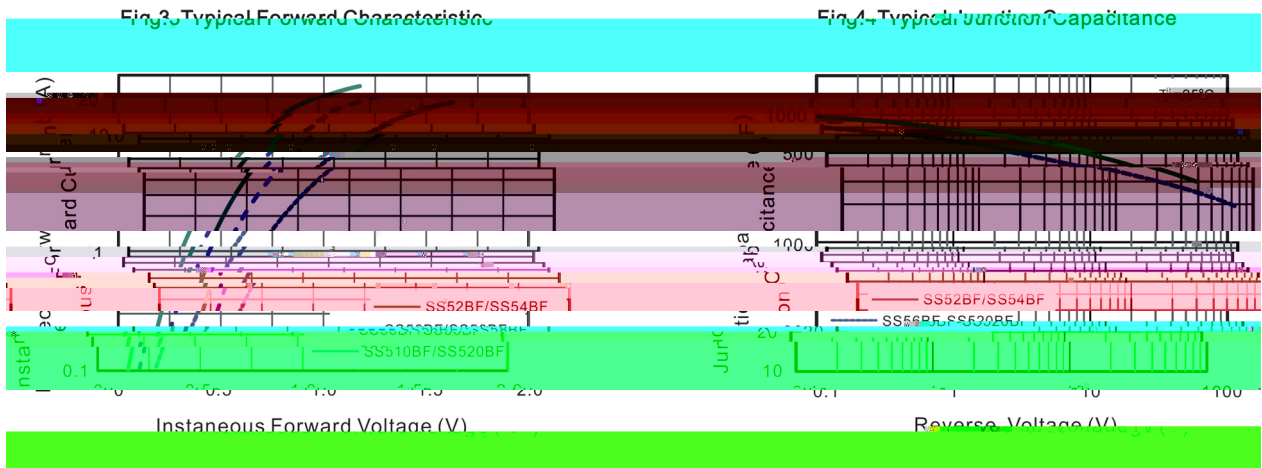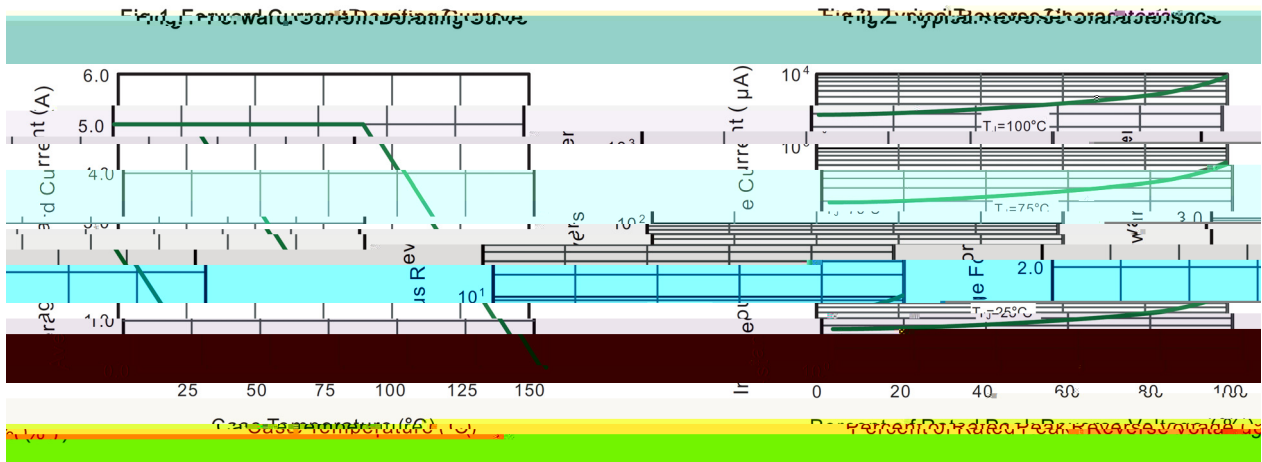

Marking

Type number	Marking code
SS52BF	S52B
SS54BF	S54B
SS56BF	S56B
SS58BF	S58B
SS510BF	S510B

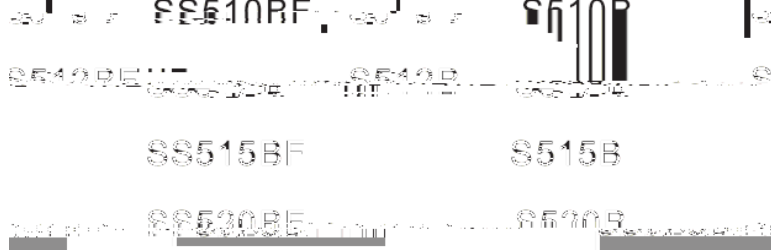

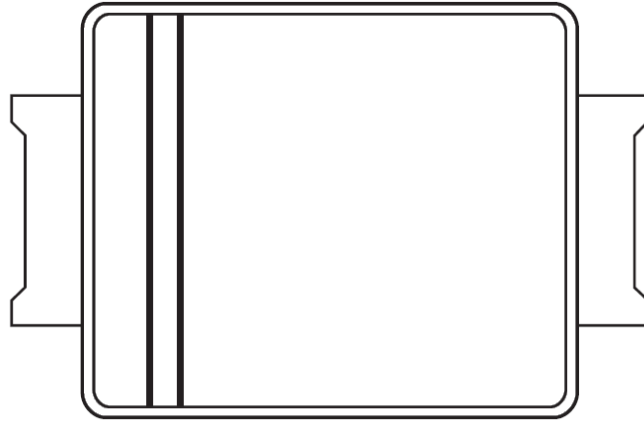

S52B

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | |
|---|-----------|-------------|---|
| 1 | 150 ~ 180 | 60 ~ 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 ± 5 | 5 ~ 0.5sec; | 2.Peak Temp.:245 ± 5 , Duration:5 ~ 0.5sec. |
| 3 | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260 ± 5 10 ± 1 sec. Temp.:260 ± 5 Time:10 ± 1 sec

/ REEL