



Rev. A Nov.-2019

4 5 6 7 8 9 3 : ; < = > ? @ A B C D E' F? G A B ; D &H%? I J K L 7 M

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 60V, Forward Current: 2.0A, SMB package.

N O P ? Q R S ? Q G A T U B ; V W ? X Y 4 5 6 7 M Z [\] M


Low power loss, High efficiency, High forward surge current capability, For surface mounted applications. HF product.

^ _ Y ` H



General purpose.



Rev. A Nov.-2019




\$, - 1 2 3

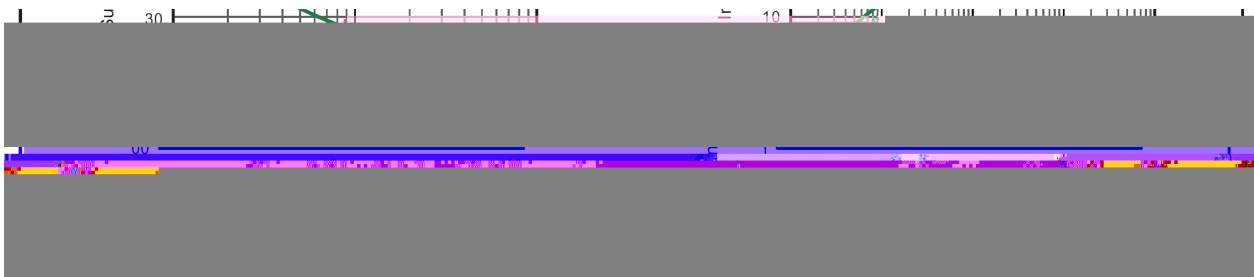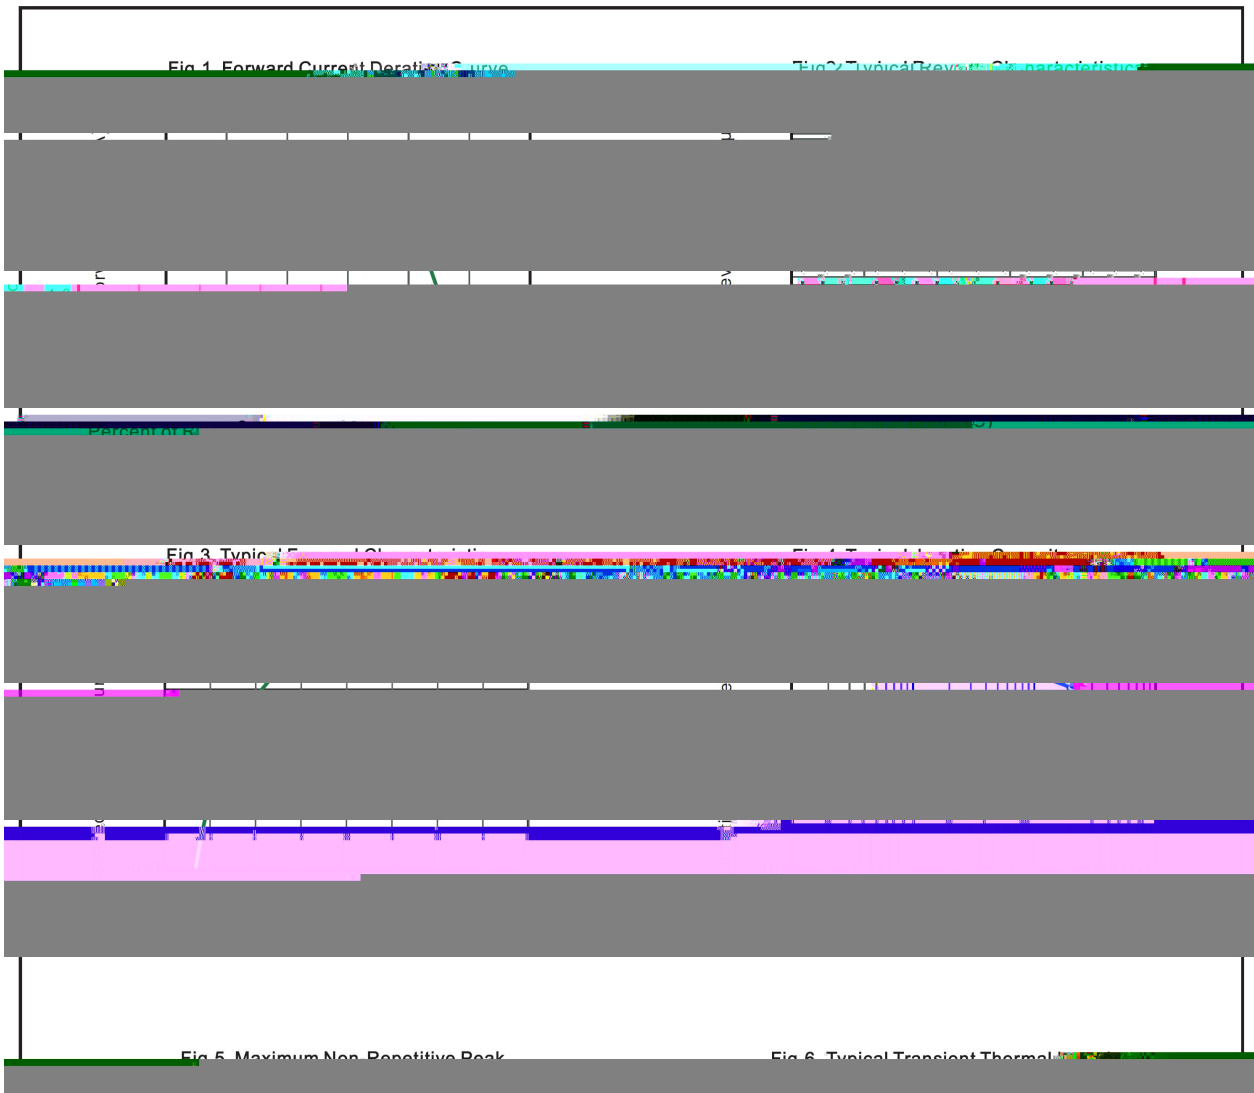





4 5 6 7 3

SMB

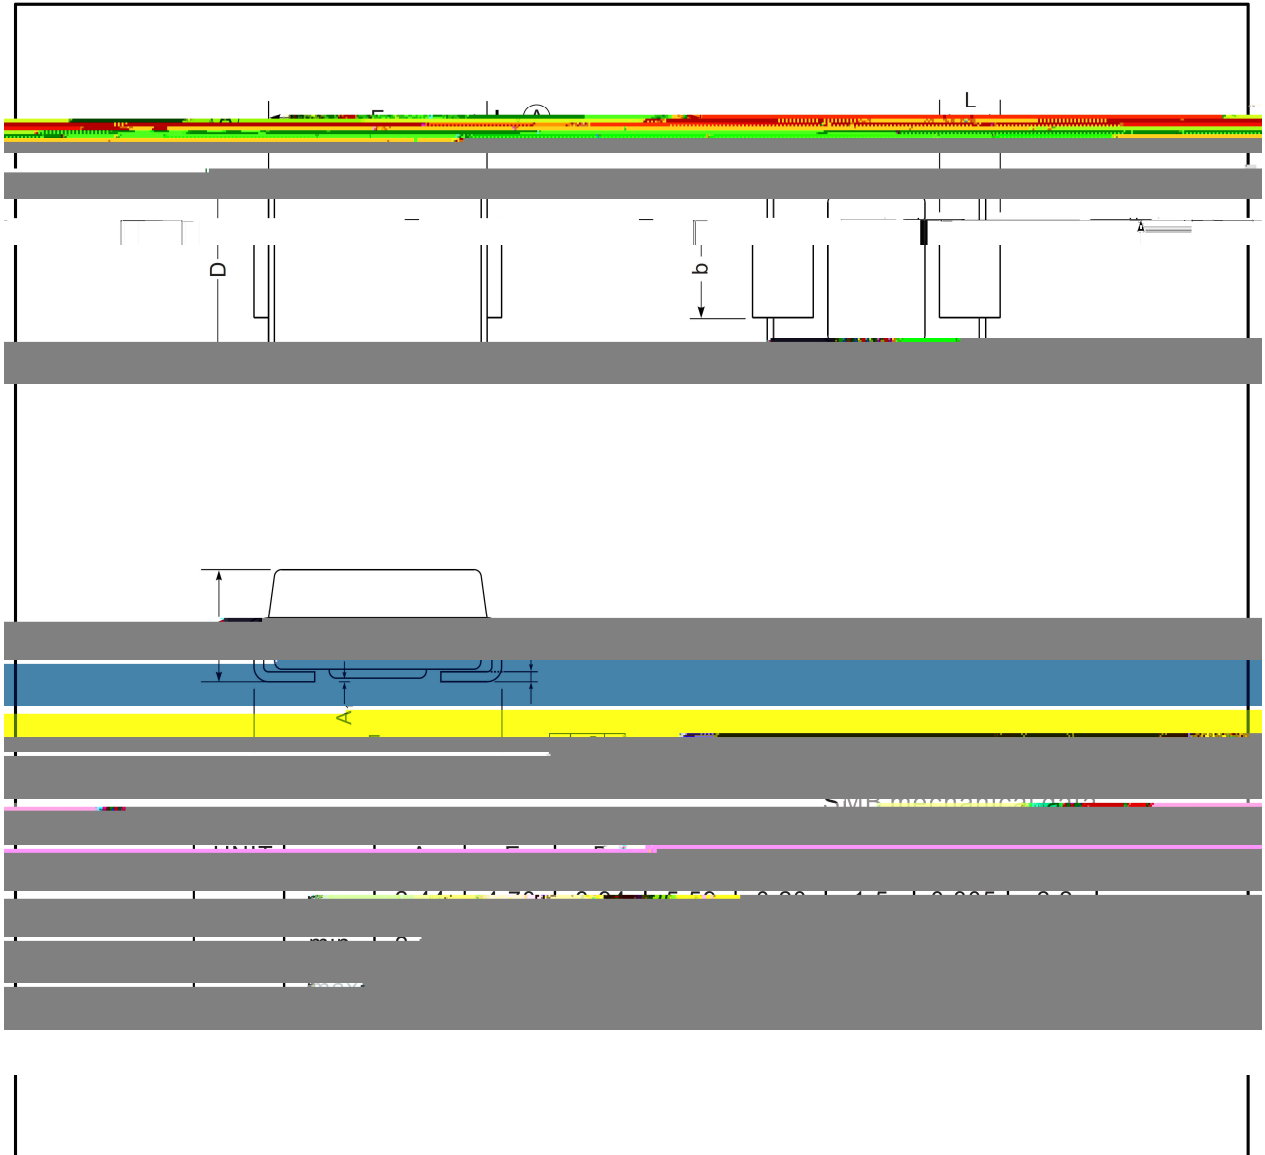

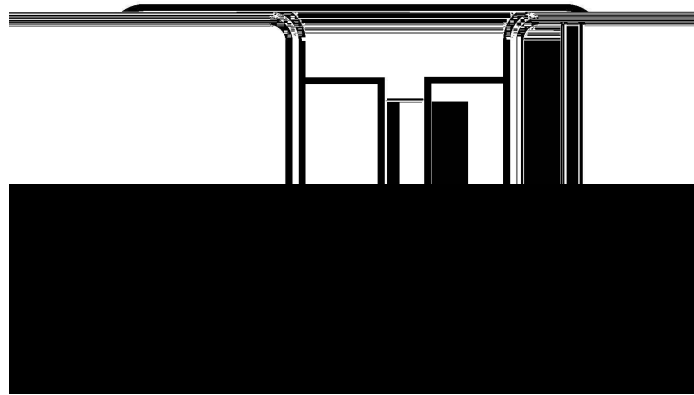


:



Rev. A Nov.-2019

< = > ? @ 1 2 3 A B CDE F DGH I J K L M N O P Q R S L O T D G U V W X Y Z []

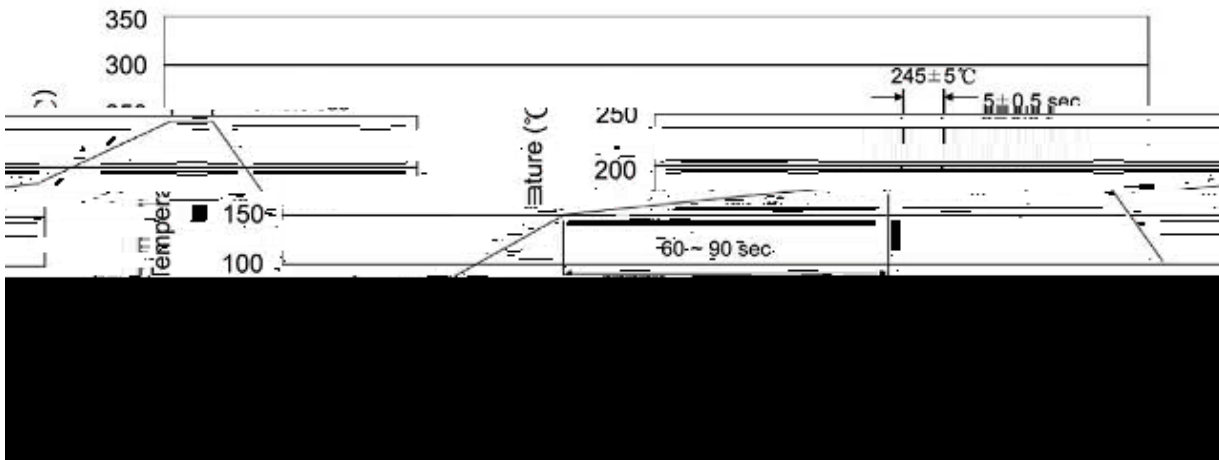

Note:

- | | | | |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

\ >] ^ _ ` a b

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

c d e f

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units / Reel 只/卷盘	Units / Reel 卷盘/盒	Units / Reel 只/盒	Units / Reel 盒/箱	Units / Reel 只/箱	Length s / l	Width l / w	Height o x / h
SMB	3000	5	15000	5	75000	7" x11	185X180X105	390X385X205

g t 8 9