


A	2020-6-3	ALL	SMA-S-SSL34-3A 40V		



40V 3.0A SMA

40V 3.0A SMA

Surface Mount Schottky Barrier Rectifier, Reverse Voltage: 40V, Forward Current: 3.0A ,SMA thin package.


Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications.Halogen free product.

Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications.Halogen free product.


General purpose.

General purpose.

fi20zŽ)1†+.3ž#Š0ž.




4ž++ž+ ,"

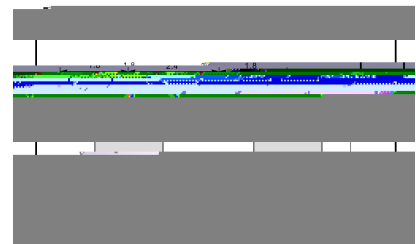

()#*ž+,

See Marking Instructions.





”

参数
Parameter

符号
Symbol


数值
Rating





“”ff” ()#*ž+, ”>+!.#0\$.ž%+!”

SSL34	SSI 34



“”“” ()#*ž+, >+!.#0\$.ž%+!”



G

SSL34
@000~

1

3

Note:

SSL34 Product Type Code

@000 Lot No. Code The 1st means:YM Code The last 3 means:little Lot No

