

5 é / Descriptions

n μ É xRK Ô Â ... v 8 â ' k F g 9 y < k 3 g v y ' k 9 3 (/ xož
Surface Mount Schottky Barrier Rectifiers, Reverse Voltage y 40V, Forward Current: 3.0A ,SMB package.

α a / Features

z ô k ä | ä k ä 3 g ~ ... v k n μ É x k —) í D } ož
Low power loss, High efficiency, High forward surge current capability, For surface mounted applications, HF Product.

Đ ÷ / Applications

%² " (ož
General purpose.

Ã W] Ô . / Equivalent Circuit




• Ű - æ / Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode


The recommended mounting pad size

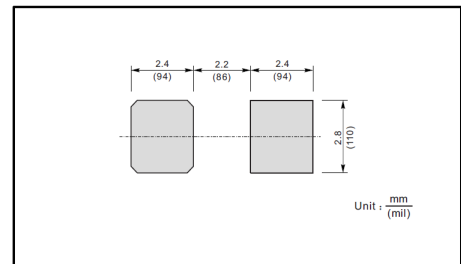


, M V / Marking

Type number	Marking
SSL34B	SSL34


Ô ? d • Ž ¢ / Electrical Characteristic Curve

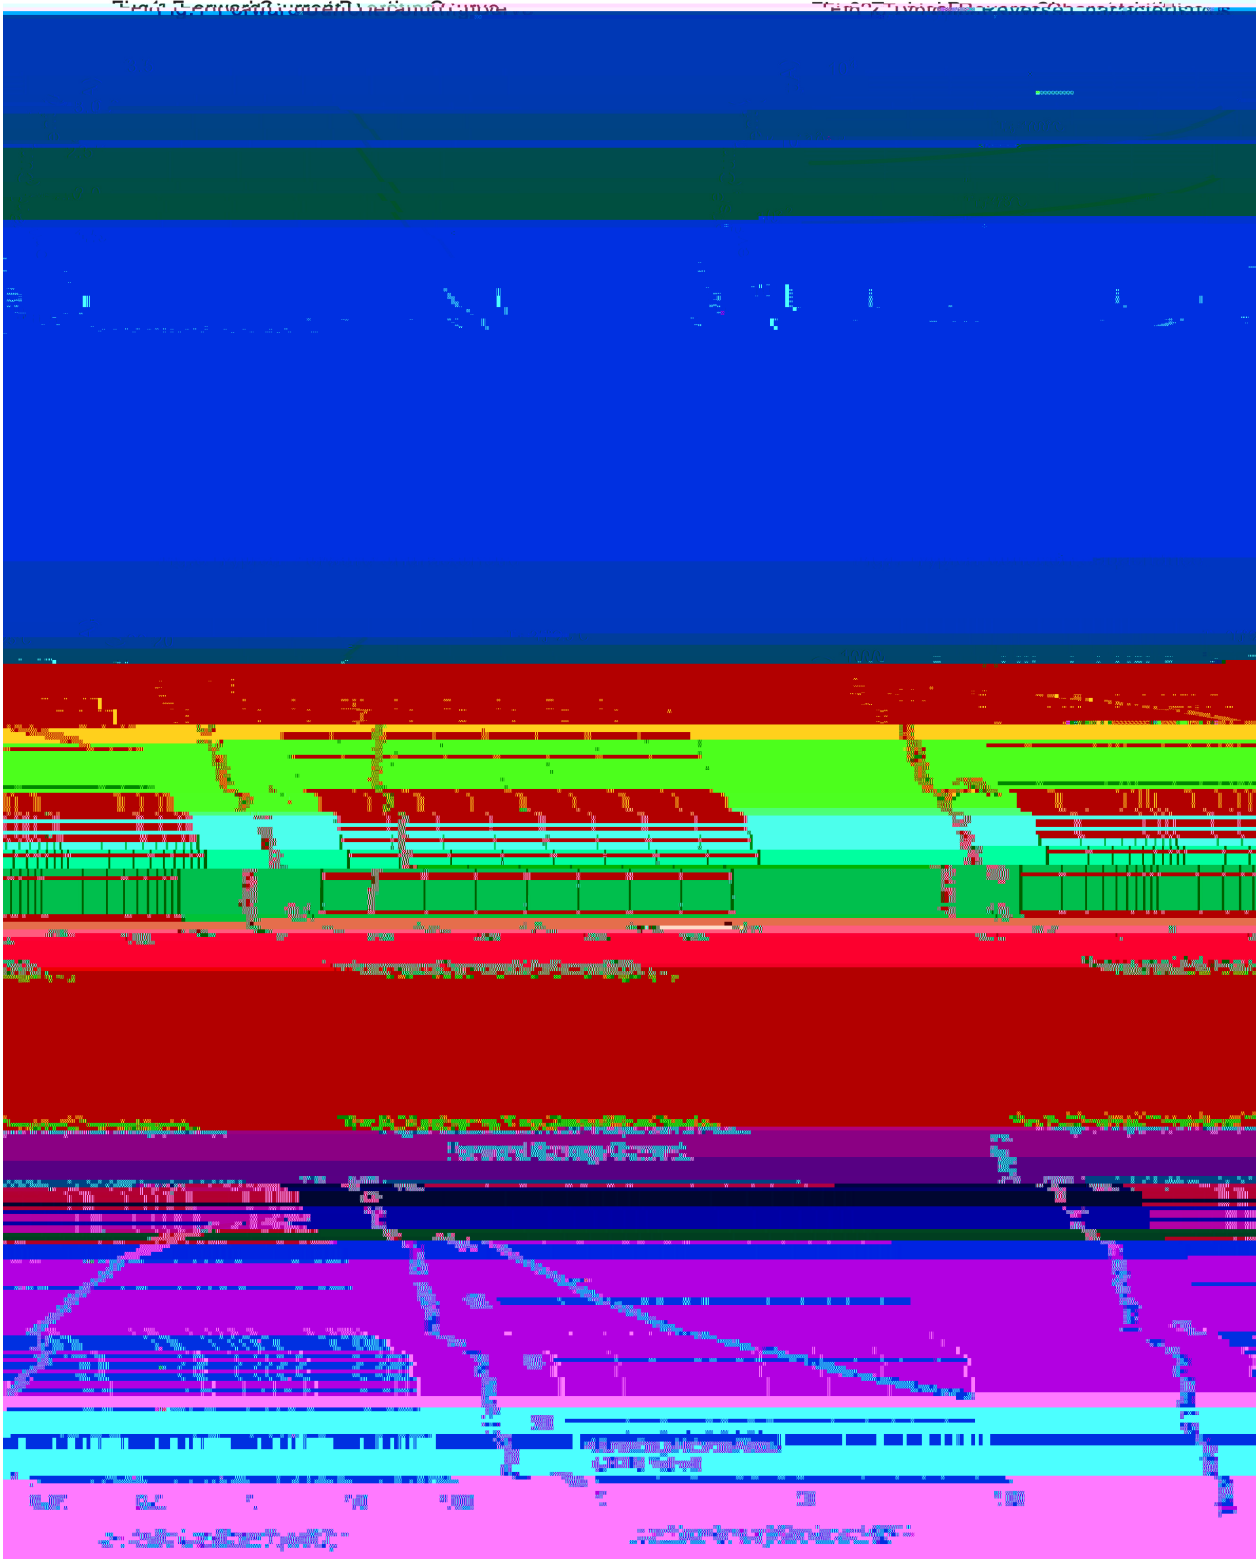

Ø ≡) ∅ / Package Dimensions

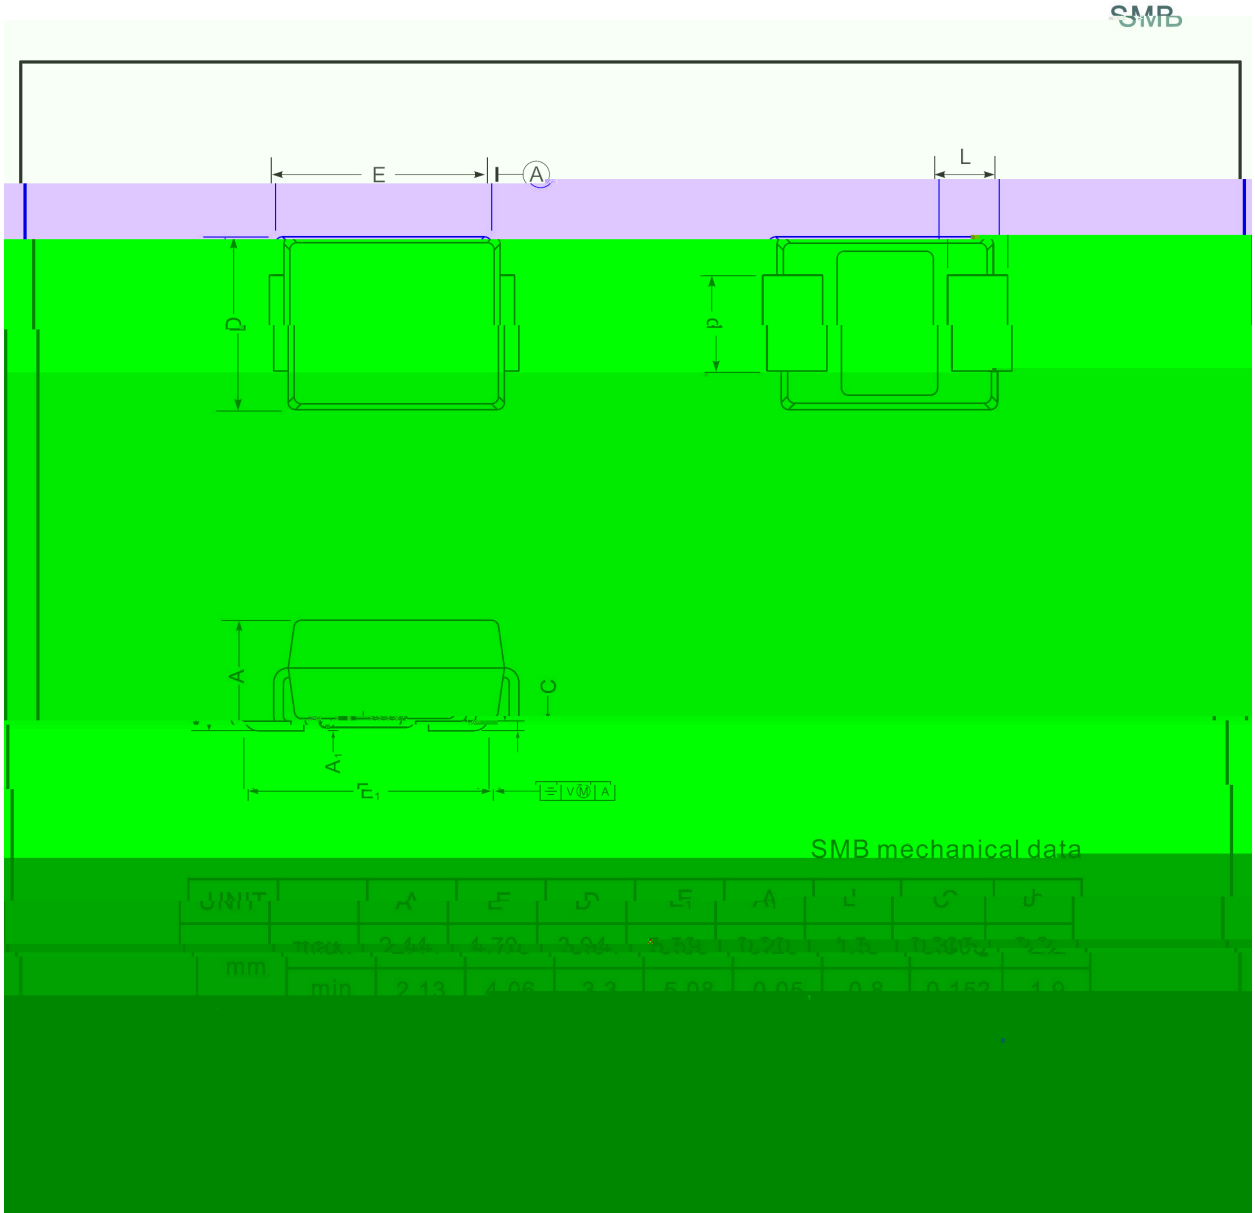

, M y f / Marking Instructions

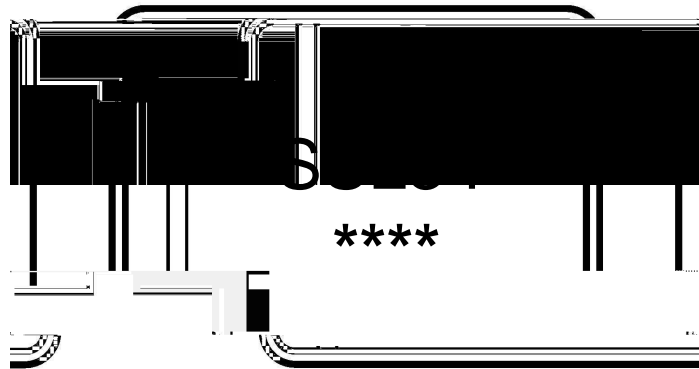

^a ç y
9 9 2 y ° Z W A
**** y ÿ D Z W A k š ÿ D Z J

Note:

9 9 2 y Product Type Code
**** y Lot No. Code, code change with Lot No Code

