





A			W01		



Rev.A Jun.-2021

60V	5.0A	SMBF
Surface Mount Schottky Barrier Rectifier, ReR P		I'



Note:

- 1) Measured at 1 MHz and applied reverse voltage of 4 V D.C
- 2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Parameter	Symbol	Test condition	Rating	Unit
-----------	--------	----------------	--------	------




Fig.1 _Forward Current Derating Curve



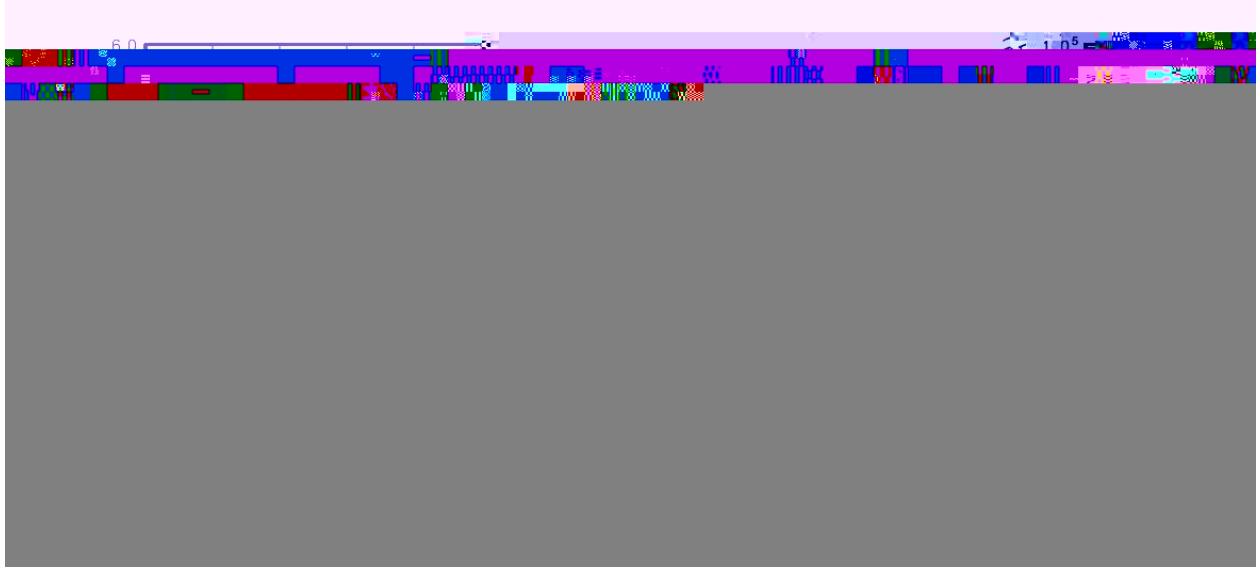


Fig.2 Typical Thermal Characteristics

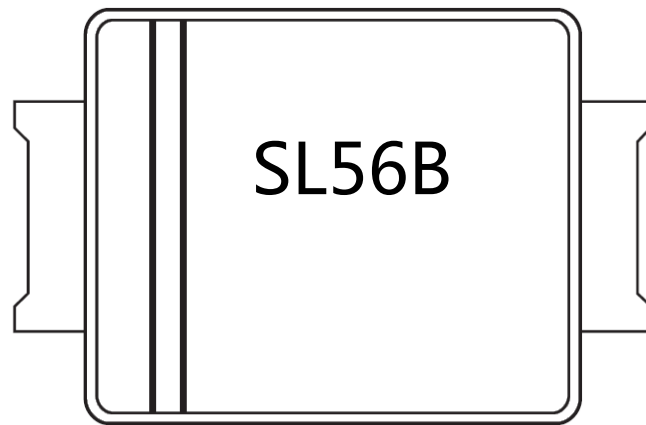

Rev.A Jun.-2021



SL56B

1 *

3 *

Note:

SL56B Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

