

1SMA5913B~1SMA5957B

Rev. B Mar.-2021



A	2019-5-8	ALL			

1SMA5913B~1SMA5957B

Rev. B Mar.-2021

SMA

Zener Diode in a SMA Plastic Package.

1.5W

3.3~ 240V

Total power dissipation: Max. 1.5W, Wide zener reverse voltage range 3.3V to 240V, Small plastic package suitable for surface mounted design. HF Product.

General purpose.

Parameter	Symbol	Rating	Unit
power dissipation at TL=75°C	P _D	1.5	W
Forward Voltage at I _F = 200 mA	V _F	1.5	V
		25	
		- 55 to + 150	
		- 55 to + 150	


Type7 (note1)	Marking (note1)	Zener Voltage Range (note2)			at I _{ZT}	Dynamic Impedance Z _{ZT} (I _{ZT})	Reverse Current		Admissible Zener Current I _{ZM} (mA)
		V _{ZT} (at I _{ZT})					at I _R	at V _R	
		Min (V)	Nom (V)	Max (V)	(mA)	Max ()	Max(μ A)	(V)	
1SMA5913B	913B	3.13	3.3	3.47	113.6	10	100	1	454

1SMA5913B~1SMA5957B
Rev. B Mar.-2021




Type (note1)	Marking (note1)	Zener Voltage Range (note2)				Dynamic Impedance Z _{ZT} (at I _{ZT})	Reverse Current		Admissible Zener Current I _{ZM} (mA)
		V _{ZT} (at I _{ZT})			at I _{ZT}		I _R	at V _R	
		Min (V)	Nom (V)	Max (V)	(mA)	Max ()	Max(μ a)	(V)	
1SMA5931B	931B	16.8	18	19.2	21	12	1	13.7	83
1SMA5932B	932B	19.0	20	21.2	19	14	1	15.2	75
1SMA5933B	933B	20.8	22	23.3	17	18	1	16.7	68
1SMA5934B	934B	22.8	24	25.2	16	19	1	18.2	
1SMA5935B	935B	25.3	27	28.9	14				

\$, - 1 2 3 / Electrical Characteristic Curve

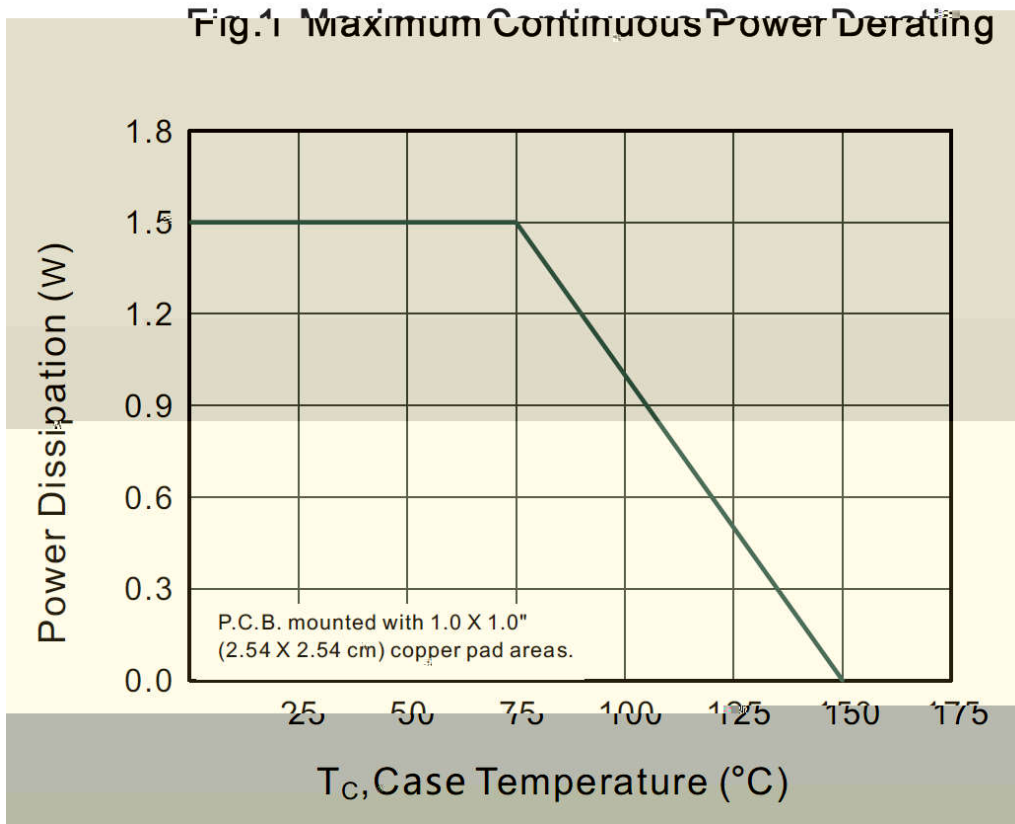

89 / Marking Instructions

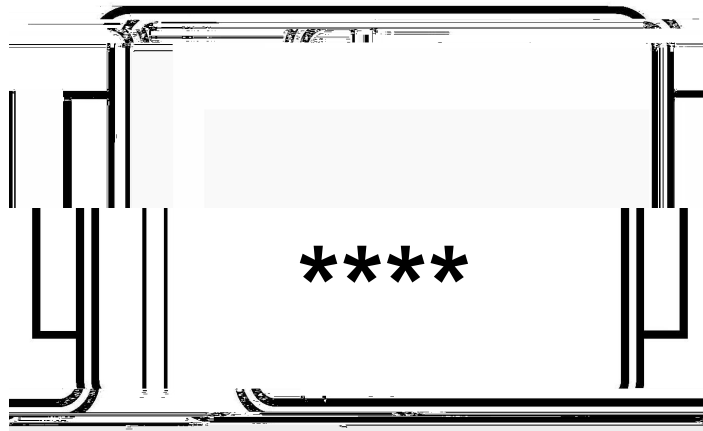

913B


1 : 3 :

Note:

913B Product Type Code

**** Lot No. Code The 1st : means:YM Code The last 3 : ;means:little Lot No Code

< = > ? @ 1 2 3 (A B) / CDE FDGHJ K L M N O P Q R S L O T D G U V W X Y Z C D D [

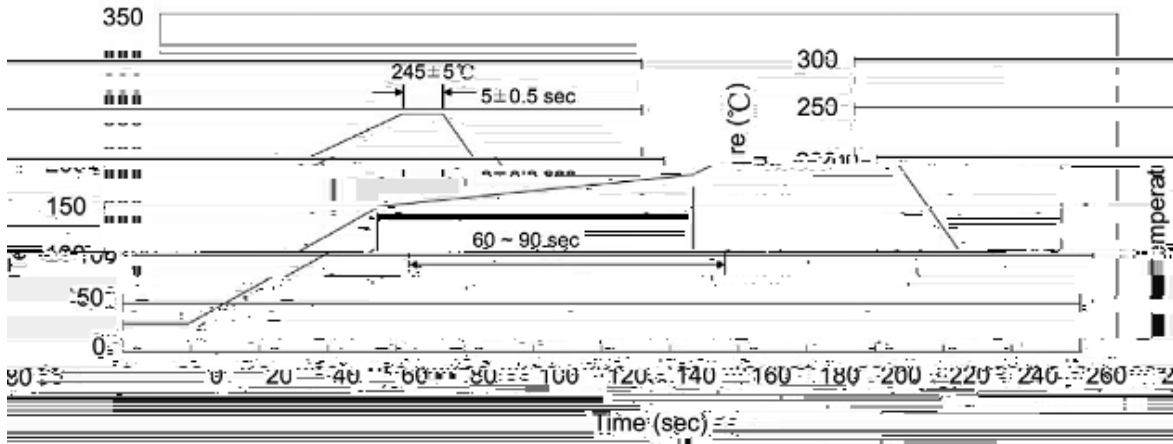

Note:

- 1 150 180 60 90sec;
- 2

1.Preheating:150~180 , Time:60~90sec.