


SOT-23 PNP Silicon PNP transistor in a SOT-23 Plastic Package.

2SD2444K

Low $V_{CE(sat)}$, large current, complementary to 2SD2444K.

General power amplifier applications.






PIN 1 Base PIN 2 Emitter PIN 3 Collector


h_{FE} Classifications Symbol	Q
h_{FE} Range	120 270
Marking	HBKQ

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-15	V
Collector to Emitter Voltage	V_{CEO}	-15	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current	I_C	-1.0	A
Collector Current	I_{CM}	-3.0	A
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown						

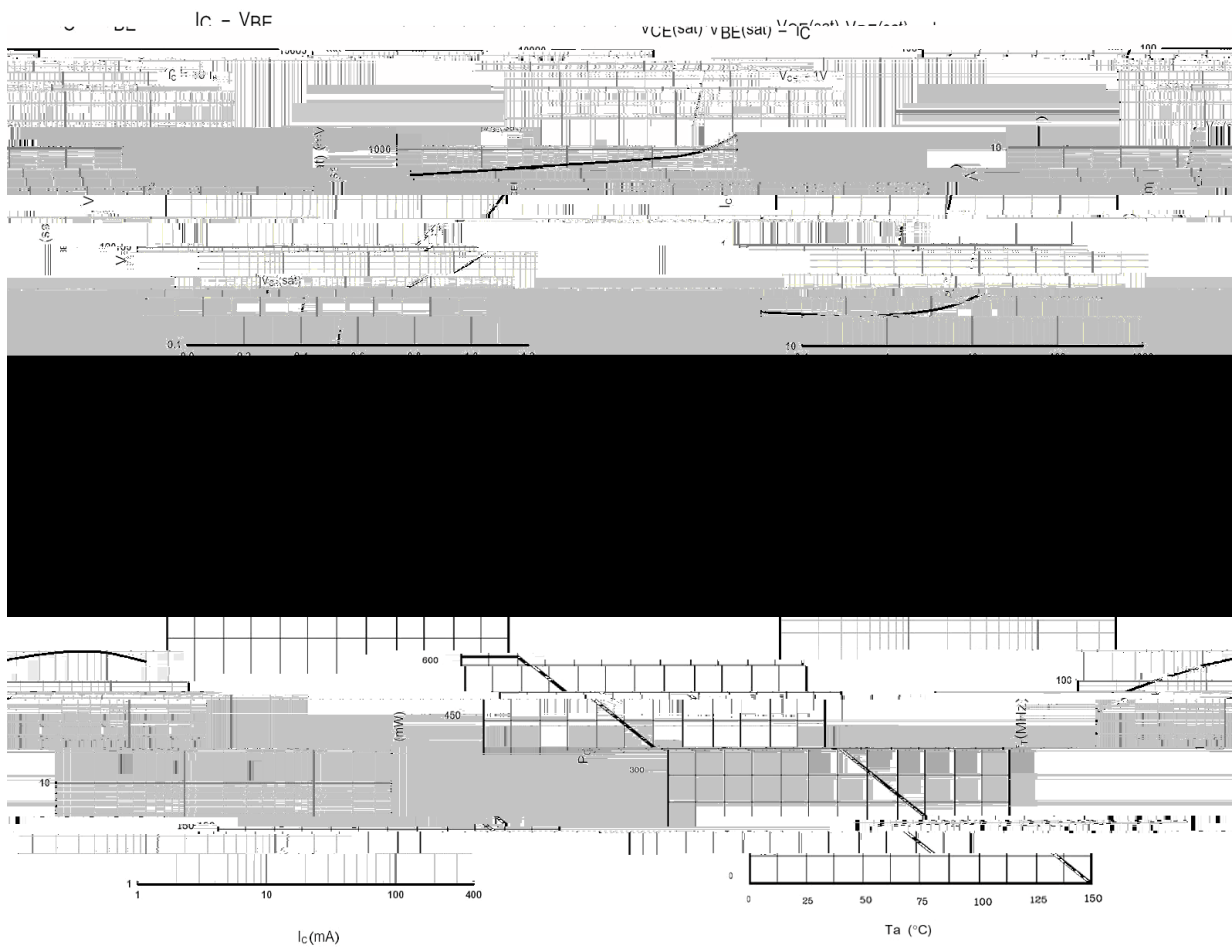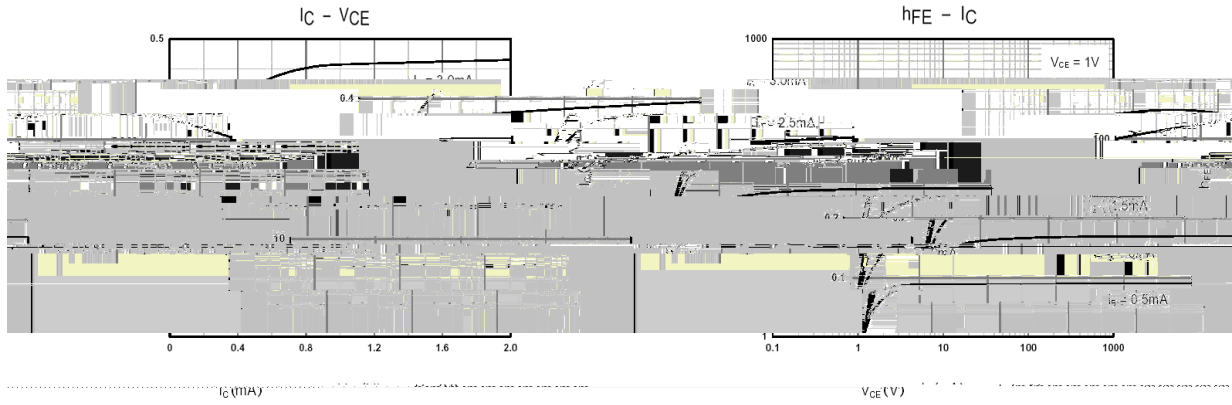


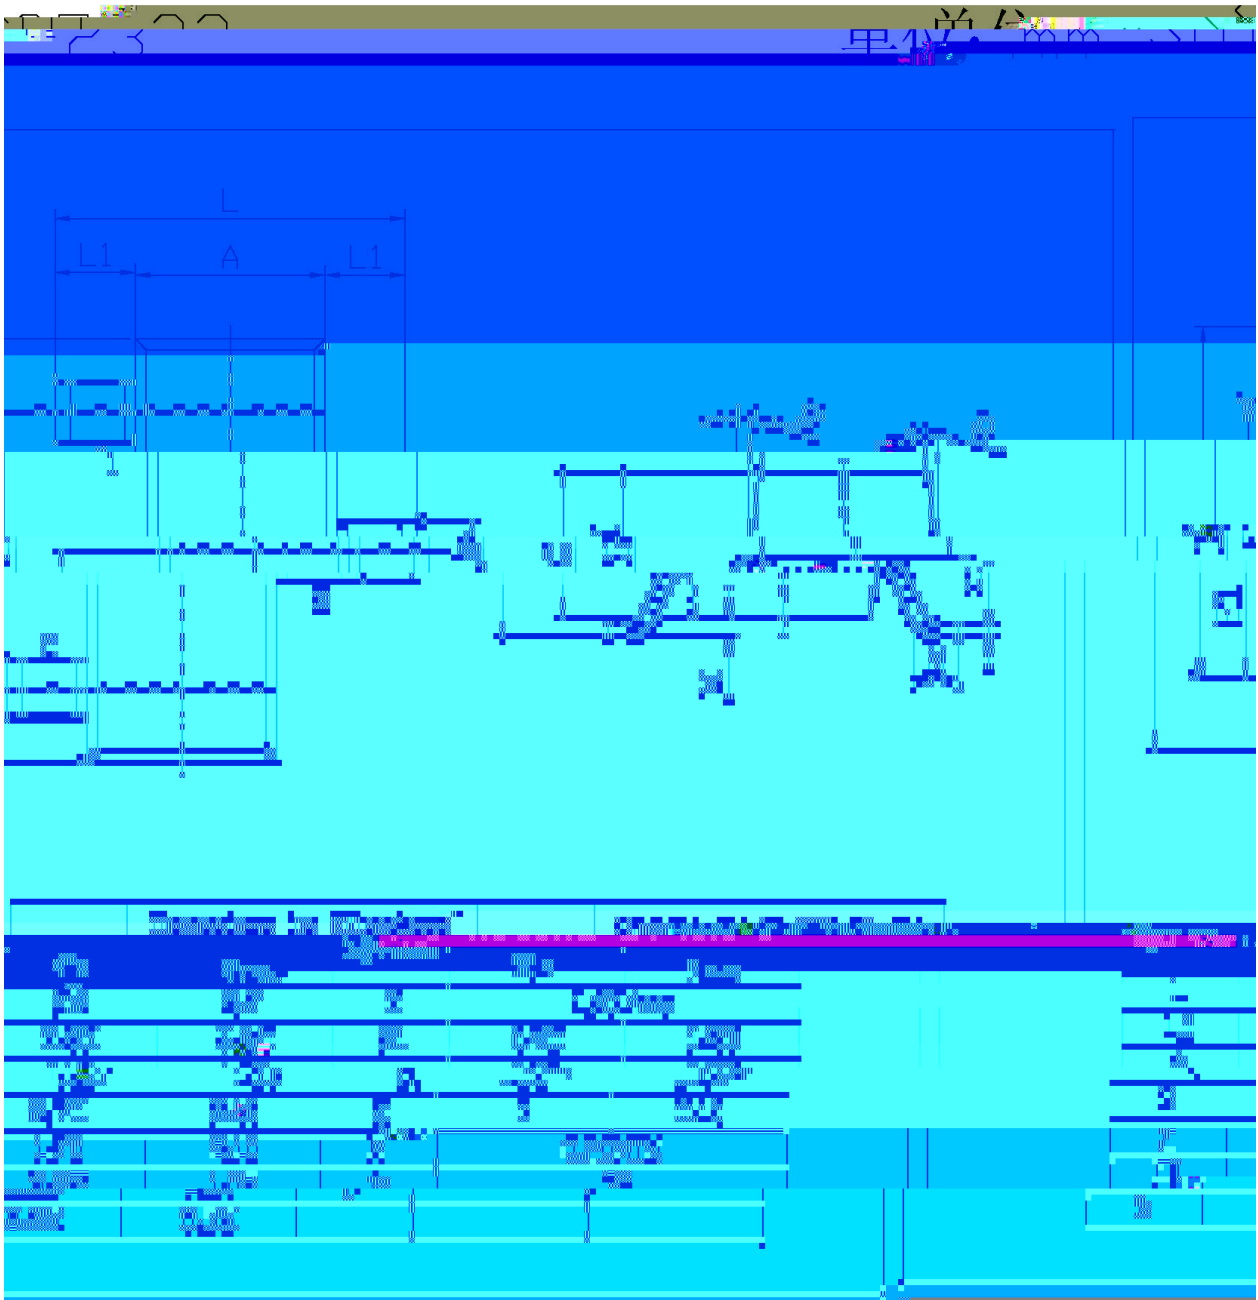

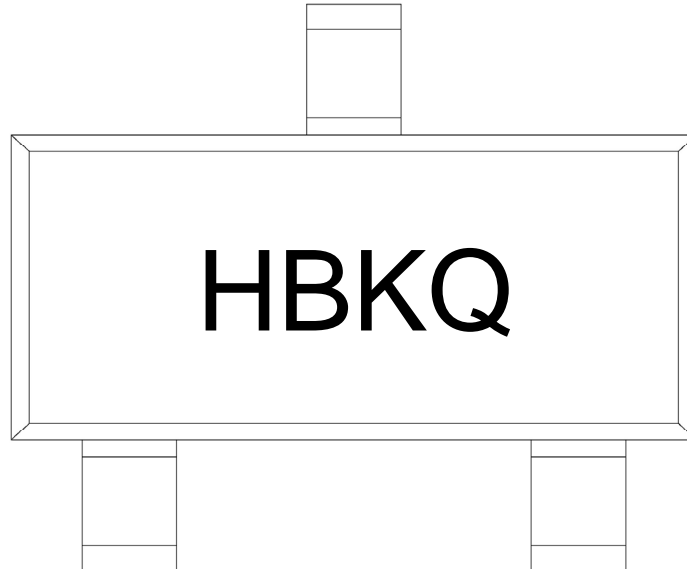

H
BK:
Q: h_{FE}
Note:
H Company Code
BK Product Type Code
Q: h_{FE} Classifications Symbol Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

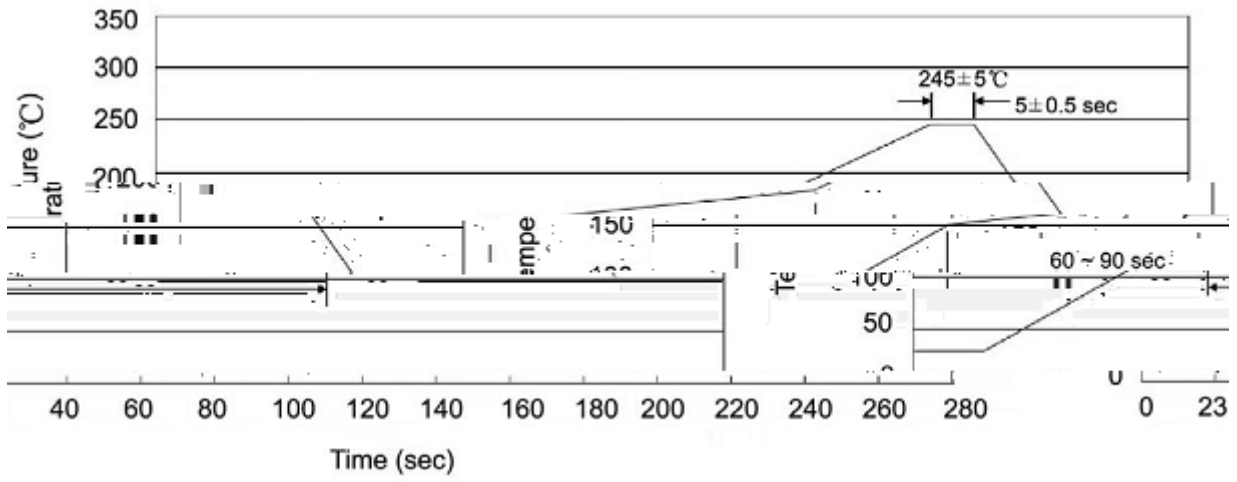

Note:

1 25 150 60