



50~1000V 25A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:25A,GBJ package.


PCB

UL

94V-0

Ideal for printed circuit board, Case material molded plastic, The plastic material has U/L flammability classification 94V-0. Halogen free product.

General purpose.



1 2 3 4

PIN1 DC+ PIN2 AC PIN3 AC PIN4 DC-

See Marking Instructions






Parameter	Symbol	Rating							Unit
		GBJ 25005	GBJ 2501	GBJ 2502	GBJ 2504	GBJ 2506	GBJ 2508	GBJ 2510	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current (with heatsink Note 2)	$I_{F(AV)}$	25							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	270							A
I^2t Rating for Fusing ($t < 8.3ms$)	I^2t	300							A^2s
Typical Junction Capacitance per element (Note1)	C_J	70							pF
Typical Thermal Resistance (Note2)	R_{Jc}	1.5							/W
Operation Temperature Range	T_j	-55 to +150							
Storage Temperature Range	T_{stg}	-55 to +150							

NOTE:

- 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
- 2.Device mounted on 150mm*150mm*1.6mm Cu Plate Heatsink.



Parameter	Symbol	Test Conditions	Rating	Unit
Maximum Forward Voltage	V_F	$I_F=12.5A$	1.0	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25^\circ C$	5.0	μA

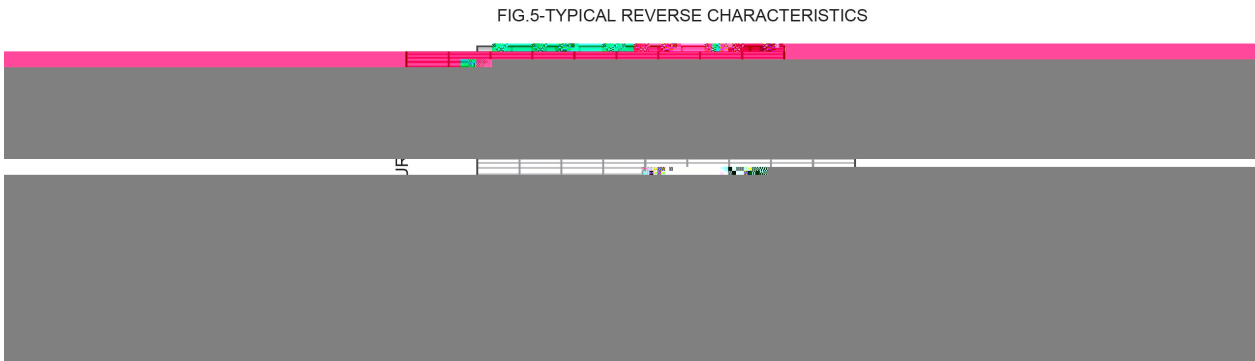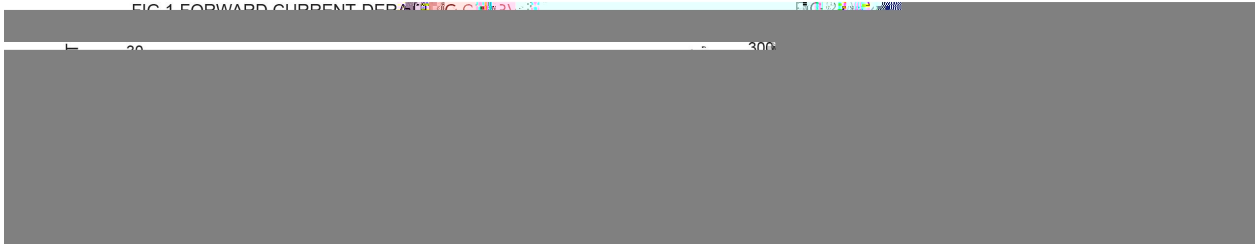



GBJ Package Outline Dimensions



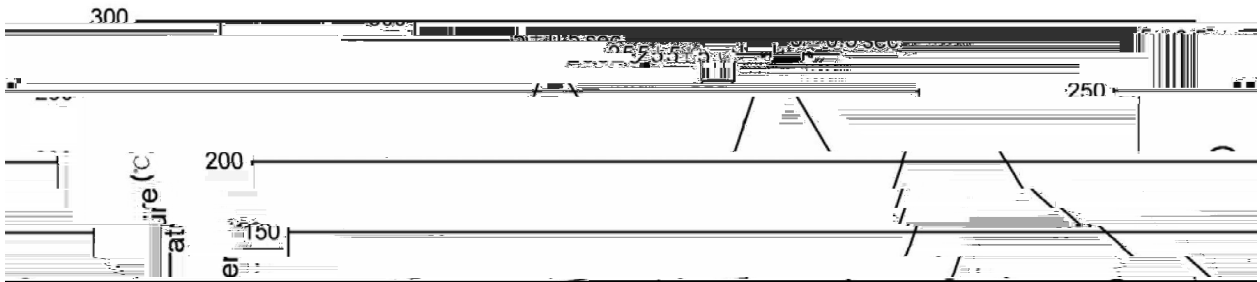

- | | | | | | | |
|---|-------|-----|-----------|--------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | Note: | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. | |

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec
-------	-----------	-------------	---------------